

WAAS
CH 45549
W16D

APP CRS
163°

Rwy Ldg
TDZE
Apt Elev

7000
576
607

RNAV (GPS) X RWY 16R
SEATTLE PAINE FLD INTL (P.A.E.)

▼
▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using SEA altimeter setting. Circling Rwy 34R NA at night. Inop table does not apply to LPV all Cats. When local altimeter setting not received, use SEA altimeter setting and increase LPV DA to 914 feet; increase LNAV/VNAV DA to 1090 feet and all visibilities to RVR 5500; increase all MDAs 100 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV Cat A/B visibility to RVR 5500.


MALSR



MISSED APPROACH:

Climb to 1100 then climbing right turn to 3000 direct ECEPO and hold, continue climb-in-hold to 3000.

ATIS 128.65	SEATTLE APP CON 128.5 306.9	PAINE TOWER* 132.95 (CTAF) 0 256.7	GND CON 121.8 339.8	UNICOM 122.95
----------------	--------------------------------	---------------------------------------	------------------------	------------------

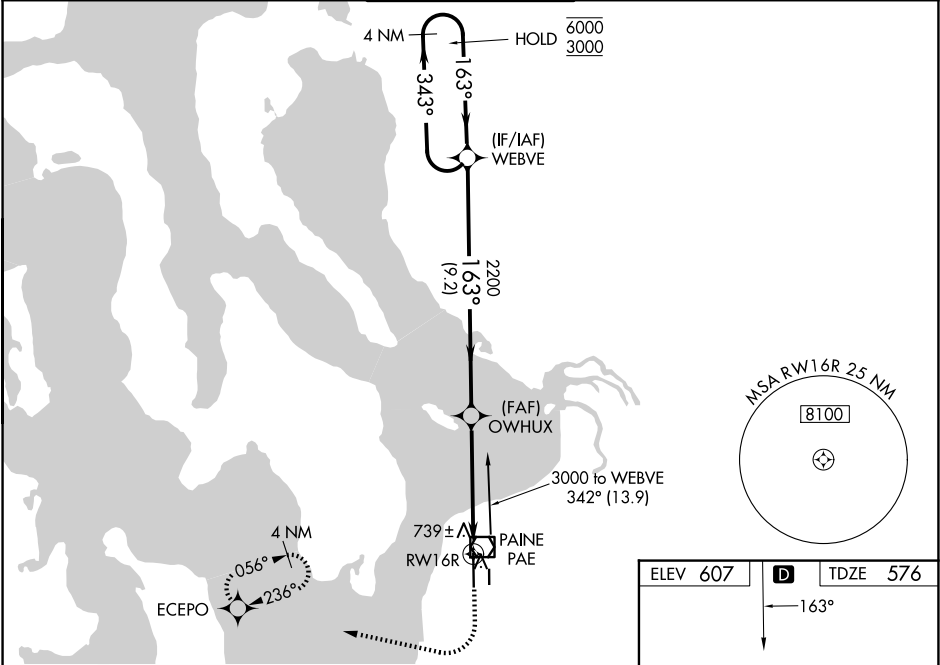

4 NM Holding Pattern

WEBVE

OWHUX

RW16R

6000
3000

GP 3.00°
TCH 57

2200

1100
3000
ECEPO

9.2 NM

3.4 NM

1.5 NM

CATEGORY	A	B	C	D
LPV DA		826/40	250 (300-¾)	
LNAV/VNAV DA		1002/40	426 (400-¾)	
LNAV MDA	1120/40	544 (600-¾)	1120/55	544 (600-1)
CIRCLING	1120-1	513 (600-1)	1120-1½ 513 (600-1½)	1160-2 553 (600-2)

ELEV 607

D

TDZE 576

163°

89L

TWR

19L

3004 X 75

34R

7000 X 130

34L

TDZL/RCLS Rwy 16R

HIRL Rwy 16R-34L

REIL Rws 16L and 34R

MIRL Rwy 16L-34R

EVERETT, WASHINGTON
Amdt 1 03SEP26

47°54'N-122°17'W

SEATTLE PAINE FLD INTL (P.A.E.)
RNAV (GPS) X RWY 16R