

WAAS CH 40012 W16A	APP CRS 165°	Rwy Ldg TDZE Apt Elev	10518 100 100
--	------------------------	-----------------------------	--

RNAV (GPS) RWY 16
PORTSMOUTH INTL AT PEASE (PSM)

RNP APCH - GPS.

▼

▲



ASR/PAR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA east of Rwy 16-34. For inop ALS, increase LPV Cat E visibility to RVR 4500; increase LNAV/VNAV all Cats visibility to RVR 4500; increase LNAV Cat C/D/E visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Rochester altimeter setting).

MALSR

MISSED APPROACH:
Climb to 3000 direct
TTATT and track 165° to
IDEED and hold, continue
climb-in-hold to 3000.

ATIS 132.05 273.5	BOSTON APP CON 125.05 269.4	PORTSMOUTH TOWER 128.4 269.0	GND CON 120.95 275.8
-----------------------------	---------------------------------------	--	--------------------------------

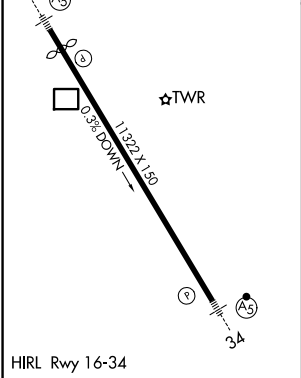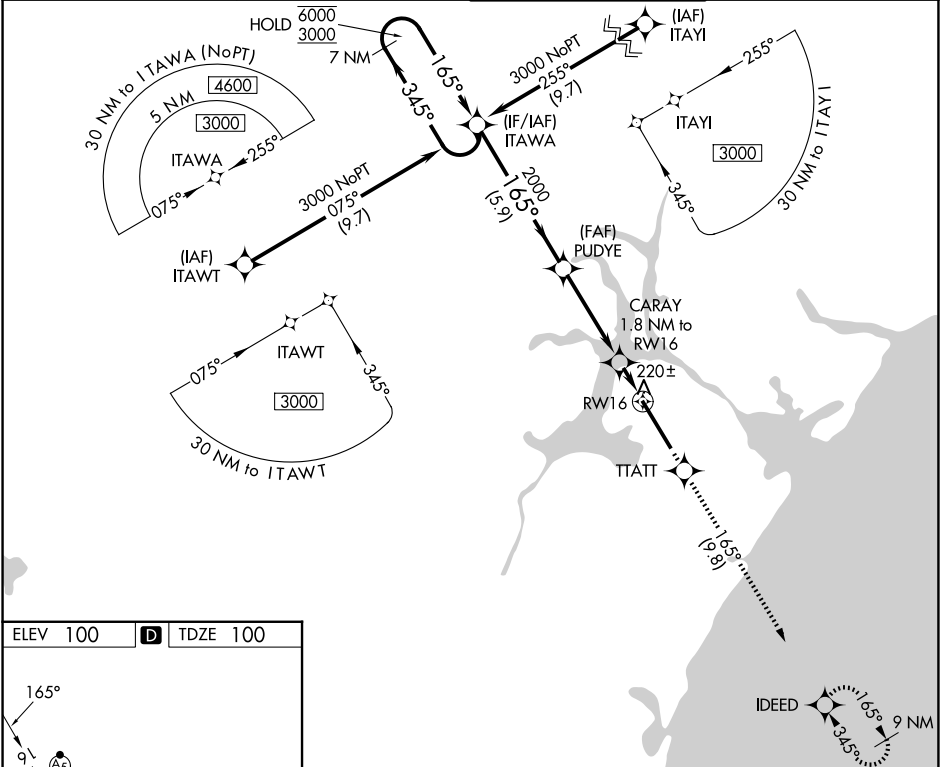

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).					
Holding Pattern IAWA					
GP 3.00° TCH 55					
CATEGORY	A	B	C	D	E
LPV DA*	300/24 200 (200-½)				
LNAV/VNAV DA	397/24 297 (300-½)				
LNAV MDA	480/24	380 (400-½)	480/35	380 (400-¾)	
CIRCLING	500-1 400 (400-1)	560-1 460 (500-1)	680-1½ 580 (600-1½)	780-2¼ 680 (700-2¼)	800-2½ 700 (700-2½)

NE-1, 01 OCT 2026 to 29 OCT 2026

NE-1, 01 OCT 2026 to 29 OCT 2026