

RNP APCH.



▼

▲NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 34 NA at night. When local altimeter setting not received, use Eugene altimeter setting and increase LPV DA to 1102 feet and all LPV visibilities ¼ SM, and increase LNAV/VNAV DA to 1474; increase all MDAs 80 feet. Baro-VNAV and VDP NA when using Eugene altimeter setting. Rwy 16 helicopter visibility reduction below ¼ SM NA.

MISSED APPROACH: Climbing right turn to 6000 direct CURTI and hold, continue climb-in-hold to 6000.

AWOS-3 119.275	CASCADE APP CON ★ 119.6	UNICOM 122.7 (CTAF) 0
--------------------------	-----------------------------------	---------------------------------

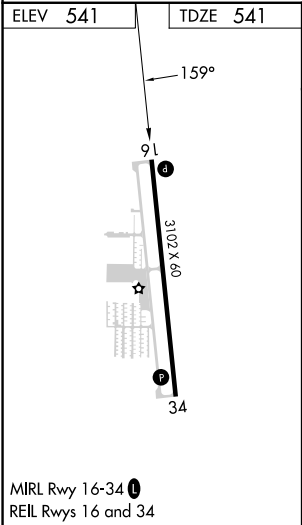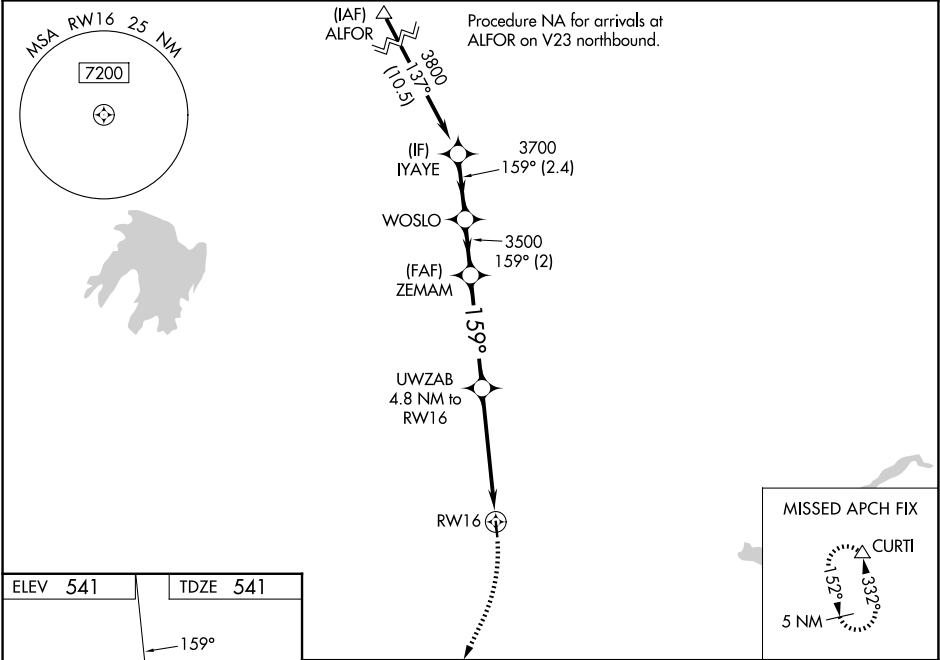

VGSi and RNAV glidepath not coincident (VGSi Angle 3.60/TCH 26).					6000	CURTI
IYAYE WOSLO ZEMAM UWZAB RWY 16					CURTI	
3800 3700 3500 3500 2160					CURTI	
GP 3.10° 159° 159° 159° 159°					CURTI	
2.4 NM 2 NM 4.1 NM 0.8 NM 4 NM					CURTI	
CATEGORY	A	B	C	D	CURTI	
LPV DA	1041-1⅜ 500 (500-1⅜)				CURTI	
LNAV/VNAV DA	1413-2½ 872 (900-2½)				CURTI	
LNAV MDA	1820-1¼ 1279 (1300-1¼)	1820-1½ 1279 (1300-1½)	1820-3 1279 (1300-3)	1279 (1300-3)	CURTI	
CIRCLING	1820-1¼ 1279 (1300-1¼)	1820-1½ 1279 (1300-1½)	2260-3 1719 (1800-3)	2740-3 2199 (2200-3)	CURTI	