

RNAV (GPS) RWY 1R

WAAS CH 52206 W01B	APCH CRS 010°	Rwy Idg 9756 TDZE 265 Arpt Elev 280
---------------------------------	------------------	--

(USAF) JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

DME/DME RNP-0.3 NA

T * When ALS inop, increase RVR to 40, vis to 3/4 mile.
 ** When ALS inop, increase RVR to 60, vis to 1 1/8 miles.
 *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;
 CAT CDE RVR to 60, vis to 1 1/8 miles.

ALSF-1


MISSED APPROACH: Climb to 2500 direct HULVI and hold.

ATIS 133.675 251.05	POTOMAC APP CON 128.0 335.5	TOWER 118.4 349.0	GND CON 121.8 275.8
------------------------	--------------------------------	----------------------	------------------------


**** Circling not authorized
W of Rwy 1L-19R.
For uncompensated Baro-VNAV systems, Procedure
NA below -15°C (5°F) or above 54°C (130°F).

MISSED APPROACH

HOLD 2500

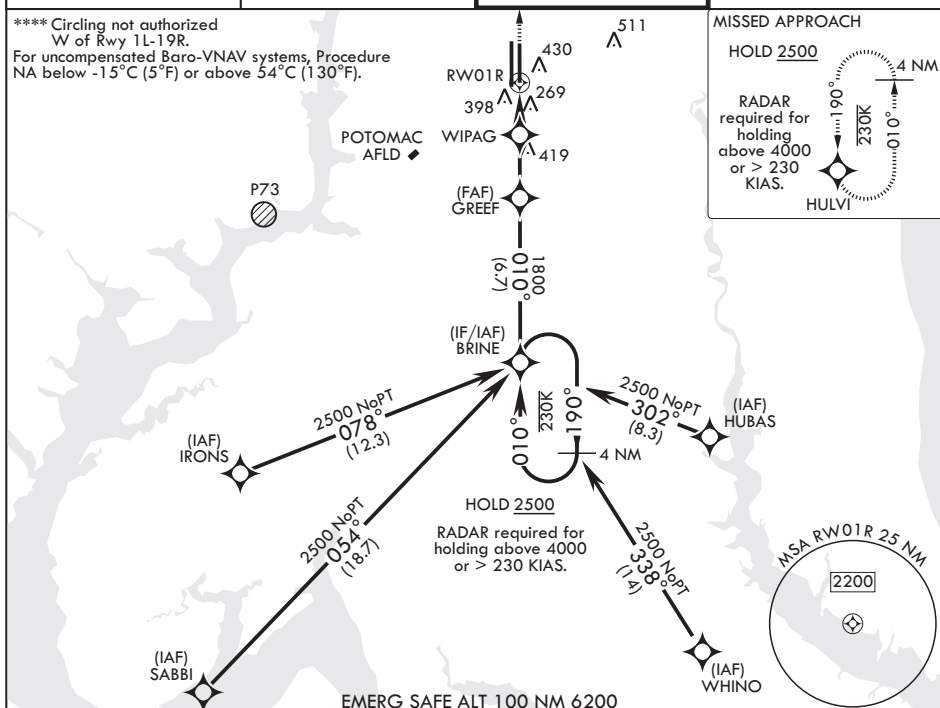

4 NM
Holding Pattern BRINE
VGS1 and RNAV
glidepath not coincident
(VGS1 Angle 3.00/TCH 61).

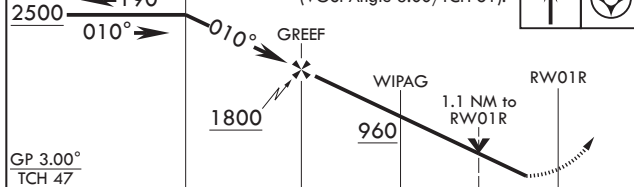

2500	
------	--

ELEV 280

TDZE 265

BCN

TWR

CATEGORY	A	B	C	D	E
LPV DA*	465/24		200	(200-½)	
LNAV/VNAV DA**	660/35		395	(400-¾)	
LNAV MDA***	660/24	395 (400-½)	660/35	395	(400-¾)
CIRCLING****	780-1	500 (500-1)	780-1½ 500 (500-1½)	840-2	560 (600-2)

HIRL all rwys (A) 1L 010° (A) 1
TDZL/RCLS R wys 1L and 19R

RNAV (GPS) RWY 1R