

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>45606</b><br><b>W23A</b> | APP CRS<br><b>238°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>8002</b><br><b>3967</b><br><b>3967</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 23


SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)

RNP APCH - GPS

▼ When local altimeter setting not received, use AIA altimeter setting: increase LPV DA to 4347 feet; increase LNAV/VNAV DA to 4679 feet; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM; LNAV Cat D visibility ½ SM, and Circling visibility Cats C/D ½ SM. Baro-VNAV and VDP NA when using AIA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. VDP NA when using Alliance altimeter setting. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 6700 direct GESBE and via 243° track to PUREE and hold.

|                        |                                      |                                 |
|------------------------|--------------------------------------|---------------------------------|
| ASOS<br><b>121.025</b> | DENVER CENTER<br><b>127.95 338.2</b> | UNICOM<br><b>123.0 (CTAF) 1</b> |
|------------------------|--------------------------------------|---------------------------------|

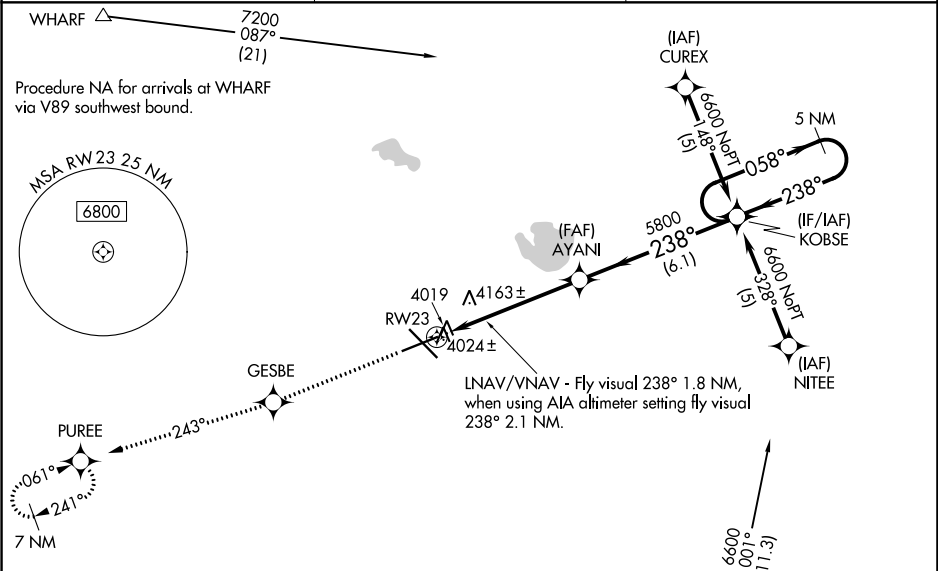

ELEV 3967 D TDZE 3967

HIRL Rwy 12-30 1

MIRL Rwy 5-23 1

|                                   |                    |             |                        |                                                                                              |                      |
|-----------------------------------|--------------------|-------------|------------------------|----------------------------------------------------------------------------------------------|----------------------|
| 6700                              | GESBE              | 243° tr     | PUREE                  | LNAV/VNAV - Fly visual 238° 1.8 NM, when using AIA altimeter setting fly visual 238° 2.1 NM. | 5 NM Holding Pattern |
|                                   |                    |             |                        |                                                                                              |                      |
| RW23 1.3 NM to RW23 4.2 NM 6.1 NM |                    |             |                        |                                                                                              |                      |
| CATEGORY                          | A                  | B           | C                      | D                                                                                            |                      |
| LPV DA                            | 4256-1 289 (300-1) |             |                        |                                                                                              |                      |
| LNAV/VNAV DA                      | 4588-2 621 (700-2) |             |                        |                                                                                              |                      |
| LNAV MDA                          | 4420-1             | 453 (500-1) | 4420-1 453 (500-1 3/8) | 4420-1 453 (500-1 1/2)                                                                       |                      |
| CIRCLING                          | 4500-1             | 533 (600-1) | 4560-1 593 (600-1 1/2) | 4740-2 773 (800-2 1/2)                                                                       |                      |