


WAAS CH 77702 W28A	APP CRS 282°	Rwy Ldg TDZE Apt Elev	9763 2858 2872
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28L


BOISE AIR TRML/GOWEN FLD (BOI)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 6000 direct JIMMI and hold, continue climb-in-hold to 6000.
Circling NA north of Rwy 10L-28R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500, and LNAV/VNAV all Cats visibility to RVR 6000.		

D-ATIS 123.9 290.4	BIG SKY APP CON 119.6 269.4	BOISE TOWER 118.1 257.8	GND CON 121.7 348.6
------------------------------	---------------------------------------	-----------------------------------	-------------------------------

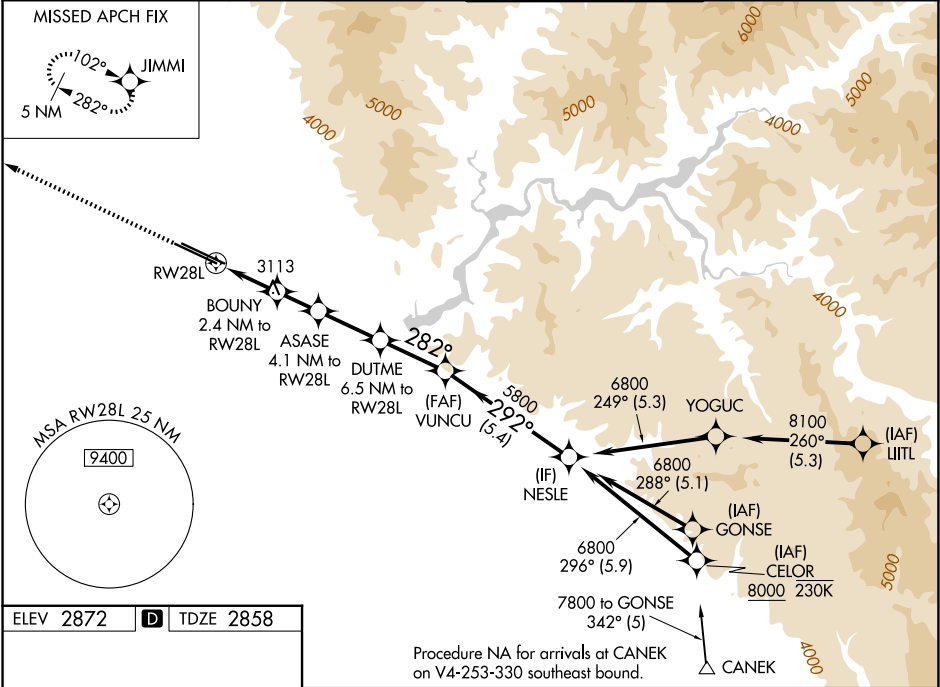

ELEV 2872	D	TDZE 2858
-----------	----------	-----------

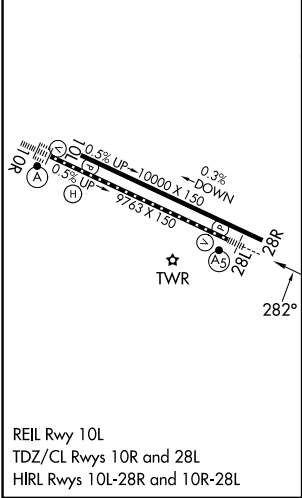

	JIMMI	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).		VUNCU	NESLE
		ASASE 4.1 NM to RW28L	DUTME 6.5 NM to RW28L	5800	6800
	BOUNY 2.4 NM to RW28L				
	1.4 NM to RW28L				
		3680	4200	4980	6800
		1.4 NM	1 NM	2.5 NM	2.6 NM
					5.4 NM
CATEGORY	A	B	C	D	
LPV DA	3160/24		302 (300-½)		
LNAV/VNAV DA	3267/40		409 (400-¾)		
LNAV MDA	3380/24		522 (600-½)		3380/55 522 (600-1)
CIRCLING	3440-1		568 (600-1)		3640-2¼ 768 (800-2¼) 3820-3 948 (1000-3)