

WAAS CH 70413 W32A	APP CRS 320°	Rwy Idg 3899 TDZE 782 Apt Elev 783
--	------------------------	---


RNAV (GPS) RWY 32
CHILICOTHE MUNI (CHT)

RNP APCH.

V Baro-VNAV and VDP NA when using Kansas City Inl altimeter setting.
A Rwy 32 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
 NA When local altimeter setting not received, use Kansas City Inl altimeter setting and increase LPV DA to 1329 and LNAV/VNAV DA to 1335 and all MDA 200 feet, increase all LPV visibilities $\frac{3}{4}$ SM and LNAV/VNAV visibilities $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 2900 direct NOLIE and hold.

AWOS-3 118.175	KANSAS CITY CENTER 125.25 235.975	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

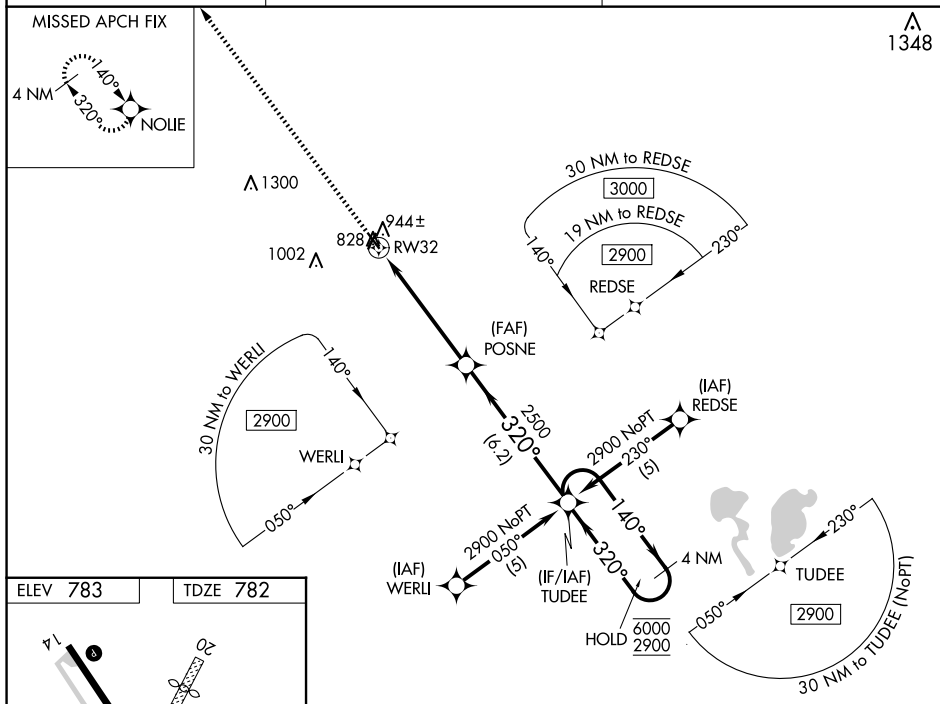

ELEV 783

TDZE 782

14 32

3503 x 110 0.4% UP

3899 x 75 0.5% UP

320° to RW32

MIRL Rwy 14-32

REIL Rws 14 and 32

VGS and RNAV glidepath not coincident (VGS Angle 3.50/TCH 44).

4 NM Holding Pattern

140° → 6000
← 320° 2900

320°

2500

POSNE

TUDEE

*RNAV only

*1.1 NM to RW32

1.1 NM

4.1 NM

6.2 NM

GP 3.00° TCH 44

CATEGORY	A	B	C	D
LPV DA	1 148-1¼ 366 (400-1¼)		NA	
RNAV/VNAV DA	1 154-1½ 372 (400-1½)		NA	
RNAV MDA	1 200-1 418 (500-1)		NA	