

WAAS
CH **69618**
W17A

APP CRS
172°

Rwy Ldg
TDZE **6187**
Apt Elev **6187**

RNAV (GPS) Y RWY 17L

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.
▲

MALSR

MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.


ATIS
125.0 254.3

SPRINGS APP CON
124.0 257.875

SPRINGS TOWER
119.9 360.6

GND CON
121.7 348.6

CLNC DEL
134.45 363.125

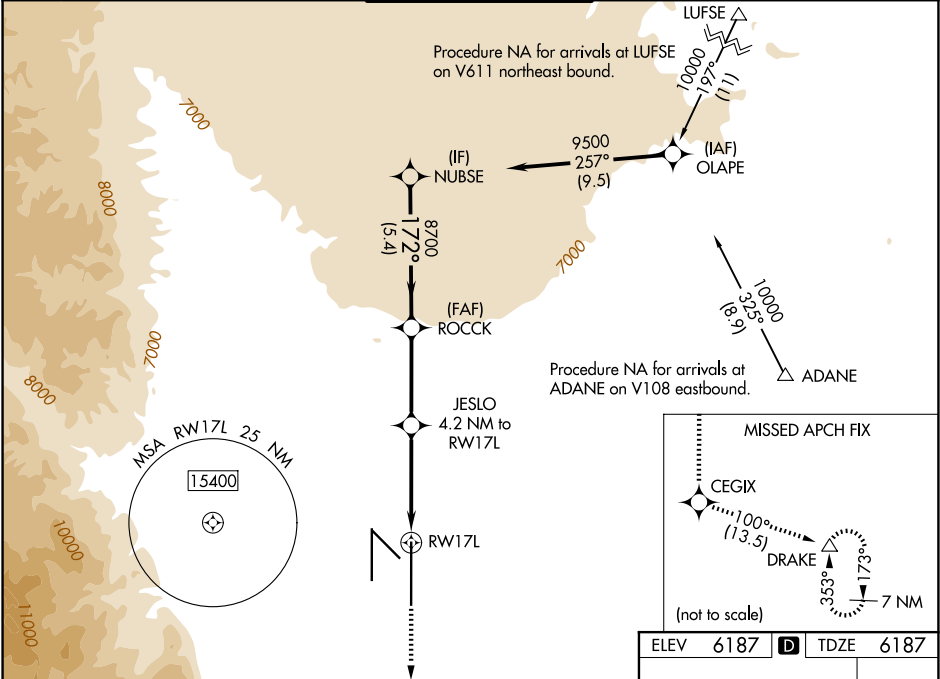

9000
↑

CEGIX

tr 100°

DRAKE

ROCCK
8700

NUBSE
9500

JESLO
4.2 NM to RW17L

RW17L

2.4 NM to RW17L

7580

GP 3.00°
TCH 57

CATEGORY

A

B

C

D

LPV DA

6387/18

200 (200-½)

LNAV/VNAV DA

6602/45

415 (500-¾)

LNAV MDA

7000/24
813 (900-½)

7000/40
813 (900-¾)

7000-1⅞
813 (900-1⅞)

813 (900-1⅞)

CIRCLING

7000-1¼
813 (900-1¼)

7040-2½
853 (900-2½)

7260-3
1073 (1100-3)

ELEV 6187

D

TDZE 6187

172°

17L
13000 X 150
0.6% DOWN
0.6% UP
35R

TWR
8270 X 150
0.5% DOWN
0.5% UP
35L

17R
13000 X 150
0.3% DOWN
0.3% UP
35L

MIRL Rwy 13-31

HIRL Rwy 17R-35L and 17L-35R

REIL Rwy 13, 17R, 31, and 35R

TDZ/CL Rwy 17L and 35R