

RNP APCH - GPS

⚠

⚠

W

Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 1/8 SM. Circling NA for Cat D southwest of Rwy 13-31.  
When local altimeter setting not received, use DLF altimeter setting: increase LPV DA to 1282 feet; increase LNAV/VNAV DA to 1431 feet; increase all MDAs 40 feet and LNAV visibility Cats C/D 1/8 SM and Circling visibility Cats C/D 1/4 SM.  
Baro-VNAV NA when using DLF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17° C or above 54°C.


MALS

⦿


⦿

MISSED APPROACH: Climb to 4000 direct AREXE and on 069° track to DLF VORTAC and hold, continue climb-in-hold to 4000.

|                        |                                         |                          |                                        |
|------------------------|-----------------------------------------|--------------------------|----------------------------------------|
| ASOS<br><b>118.525</b> | DEL RIO APP CON ★<br><b>119.6 259.1</b> | CLNC DEL<br><b>120.5</b> | UNICOM<br><b>122.8 (CTAF)</b> <b>📻</b> |
|------------------------|-----------------------------------------|--------------------------|----------------------------------------|

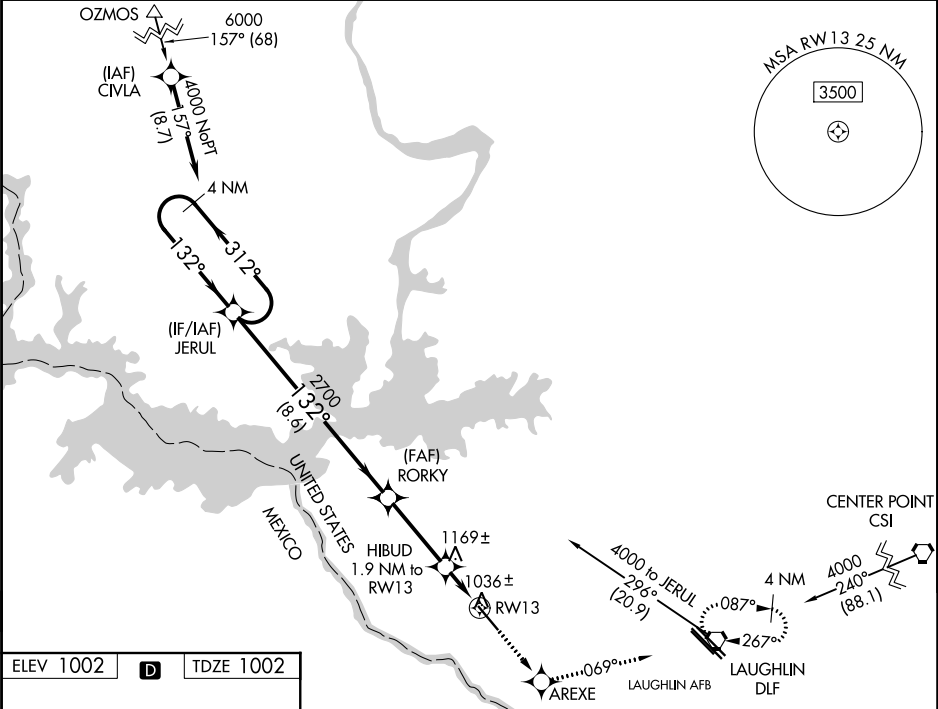

|           |          |           |
|-----------|----------|-----------|
| ELEV 1002 | <b>D</b> | TDZE 1002 |
|-----------|----------|-----------|

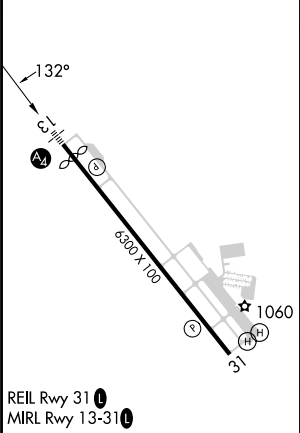

|                      |                    |                        |                            |                            |     |
|----------------------|--------------------|------------------------|----------------------------|----------------------------|-----|
| 4 NM Holding Pattern |                    | 4000                   | AREXE                      | tr 069°                    | DLF |
| JERUL                |                    | RORKY                  | HIBUD 1.9 NM to RW13       | RW13                       |     |
| 4000 ← 312°          |                    | 2700                   | 1640                       |                            |     |
| GP 3.00° TCH 48      |                    | 8.6 NM                 | 3.2 NM                     | 1.9                        |     |
| CATEGORY             | A                  | B                      | C                          | D                          |     |
| LPV DA               |                    | 1252-3/4               | 250 (300-3/4)              |                            |     |
| LNAV/VNAV DA         |                    | 1401-1                 | 399 (400-1)                |                            |     |
| LNAV MDA             |                    | 1500-3/4 498 (500-3/4) | 1500-1 1/8 498 (500-1 1/8) |                            |     |
| CIRCLING             | 1500-1 498 (500-1) | 1560-1 558 (600-1)     | 1740-2 738 (800-2)         | 1740-2 1/4 738 (800-2 1/4) |     |