



LOC I-FFM 111.5	APP CRS 308°	Rwy Ldg TDZE 1182 Apt Elev 1183
---------------------------	------------------------	---

ILS or LOC RWY 31

FERGUS FALLS RGNL (FFM)

ADF or DME required.	MALSR 	MISSED APPROACH: Climb to 3000 then right turn direct HAMRE LOM/FFM 5.9 DME and hold.
NA When local altimeter setting not received, use Elbow Lake altimeter setting and increase DA to 1428 and all MDAs 60 feet; increase S-LOC Cat C/D visibility ½ SM and Circling Cat C/D visibility ¼ SM. For inop MALSR, increase S-LOC 31 Cat D visibility ¼ mile. GS unusable for coupled approaches below 1400.		

AWOS-3PT 119.05	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

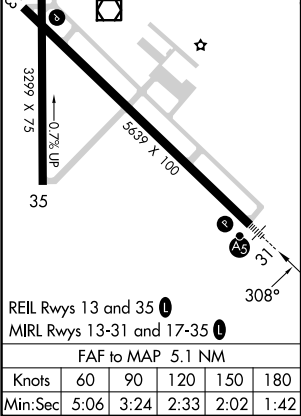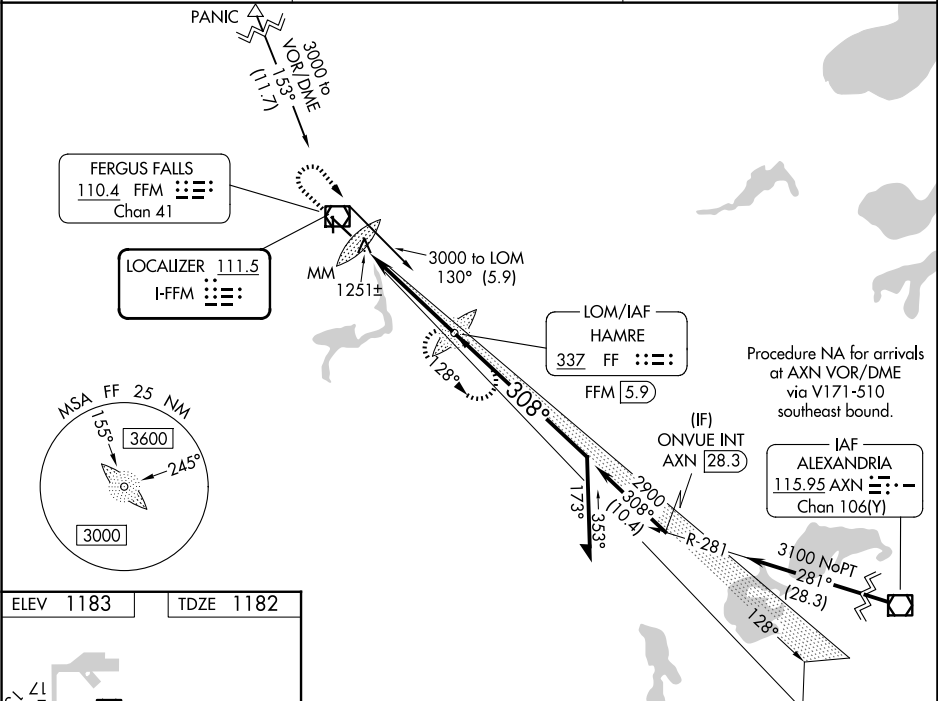

3000 				
FF LOM HAMRE FFM 5.9 2877 128° 3000 308° 2900 GS 3.00° TCH 52				
0.4 4.7 NM				
CATEGORY	A	B	C	D
S-ILS 31	1382-½ 200 (200-½)			
S-LOC 31	1520-½ 338 (400-½)			1520-¾ 338 (400-¾)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1¾ 637 (700-1¾)	1940-2½ 757 (800-2½)

NC-1, 01 OCT 2026 to 29 OCT 2026

NC-1, 01 OCT 2026 to 29 OCT 2026