

ILS or LOC RWY 23R


LOC I-FFO 109.7	APCH CRS 233°	Rwy Idg THRE 823 Arpt Elev 823
---------------------------	-------------------------	--


[USAF]

WRIGHT-PATTERSON AFB (KFFO)

DME or RADAR required for Localizer.	ALSIF-1 	† MISSED APPROACH: Climb via FFO R-233 to 2000, at 3 DME turn left direct CLACK to 3000 and hold.
▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile. **When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1¾ miles.		

ATIS 124.475 269.9	COLUMBUS APP CON 118.85 269.275	PATTERSON TOWER 127.8 281.45	GND CON 121.8 335.8
------------------------------	---	--	-------------------------------

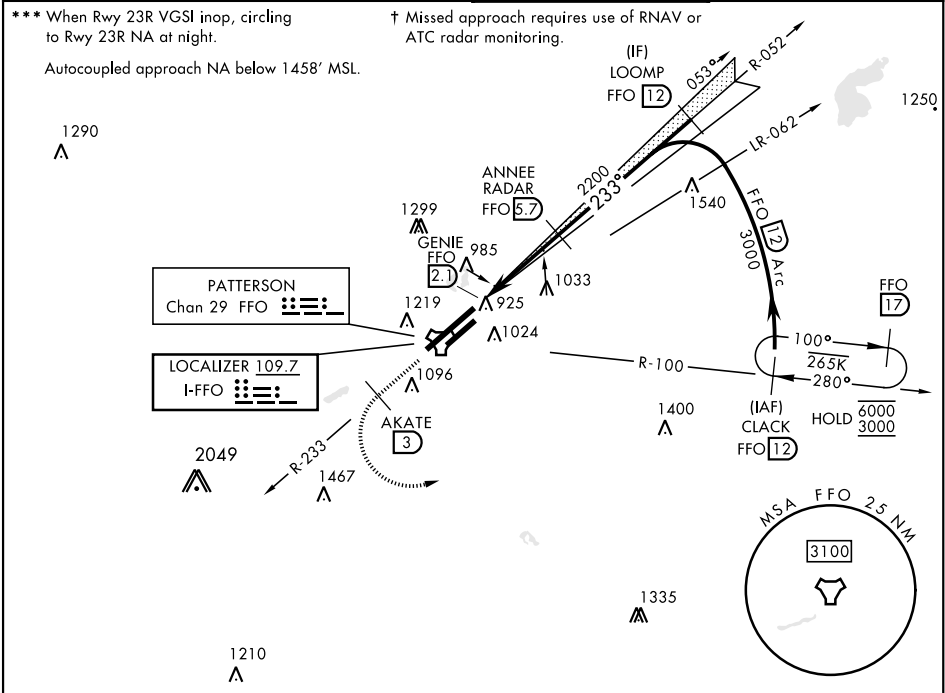

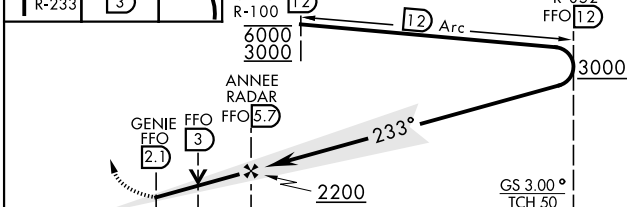EMERG SAFE ALT 100 NM 3700						ELEV 823	THRE 823
2000 ↑ FFO R-233	AKATE FFO 3	3000	VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 53).			LOOMP R-052 FFO 12	
							
CATEGORY A B C D E							
S-ILS 23R* 1023/24 200 (200-½)							
S-LOC 23R** 1320/24 497 (500-½) 1320/50 497 (500-1)							
CIRCLING*** 1380-1 1440-1 1560-2 1620-2½ 1620-2¾							
557 (600-1) 617 (600-1) 737 (800-2) 797 (800-2½) 797 (800-2¾)							
DAYTON, OHIO Amdt 7 10AUG23						WRIGHT-PATTERSON AFB (KFFO) ILS or LOC RWY 23R	

DAYTON, OHIO 39° 50'N-84° 03'W WRIGHT-PATTERSON AFB (KFFO)

ILS or LOC RWY 23R

EC-2, 01 OCT 2026 to 29 OCT 2026

EC-2, 01 OCT 2026 to 29 OCT 2026