

## ILS or LOC RWY 5L

|                                  |                         |                                                                  |
|----------------------------------|-------------------------|------------------------------------------------------------------|
| LOC I-FAE<br><b><u>109.7</u></b> | APCH CRS<br><b>053°</b> | Rwy Idg <b>12,600</b><br>TDZE <b>803</b><br>Arpt Elev <b>823</b> |
|----------------------------------|-------------------------|------------------------------------------------------------------|

[USAF]

WRIGHT-PATTERSON AFB (KFFO)

DME or RADAR required for Localizer.

ALSF-1

† MISSED APPROACH: Climb to 2000 via FFO R-053 at 5 DME, turn right direct CLACK climbing to 3100 and hold.


**T** \* When ALS inop, increase RVR to 40 and vis to  $\frac{3}{4}$  mile.

|                       |                                    |                                 |                        |
|-----------------------|------------------------------------|---------------------------------|------------------------|
| ATIS<br>124.475 269.9 | COLUMBUS APP CON<br>118.85 269.275 | PATTERSON TOWER<br>127.8 281.45 | GND CON<br>121.8 335.8 |
|-----------------------|------------------------------------|---------------------------------|------------------------|



**\*\* When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 $\frac{3}{8}$  miles.**

\*\*\* When Rwy 23R VGSI inop,  
circling to Rwy 23R NA at night.

† Missed approach requires use of RNAV or ATC RADAR monitoring.

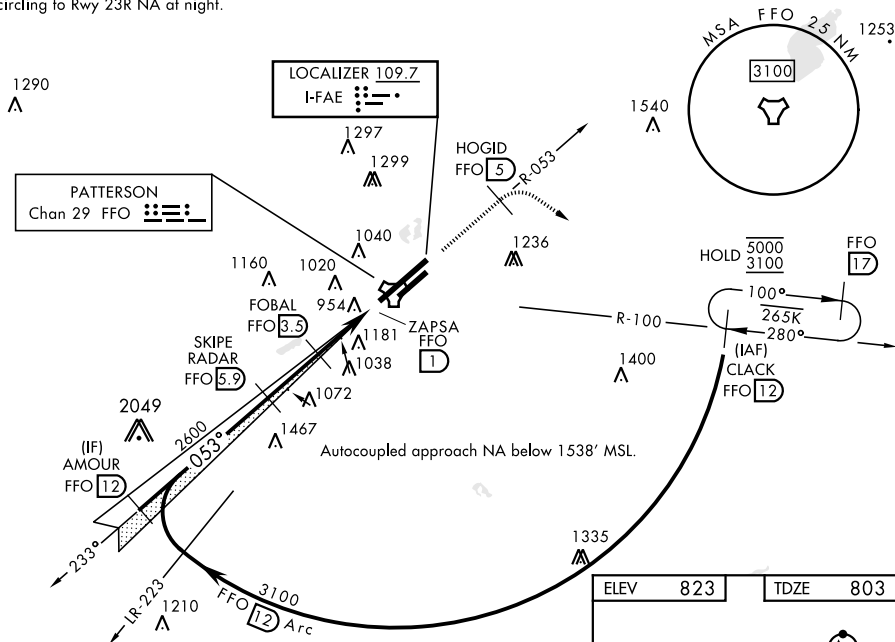

EMERG SAFE ALT 100 NM 3700

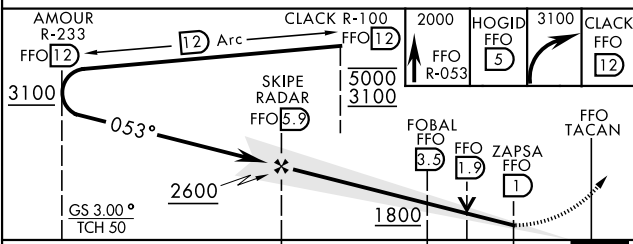

| CATEGORY    | A                     | B                     | C                     | D                       | E                       |
|-------------|-----------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| S-ILS 5L *  | 1003/24               |                       | 200                   | (200-½)                 |                         |
| S-LOC 5L**  | 1280/24               | 476 (500-½)           | 1280/50 476 (500-1)   |                         |                         |
| CIRCLING*** | 1380-1<br>557 (600-1) | 1440-1<br>617 (700-1) | 1560-2<br>737 (800-2) | 1620-2½<br>797 (800-2½) | 1620-2¾<br>797 (800-2¾) |

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| HIRL Rwy 5L-23R   |      | 1038 |      |      |      |
| MIRL Rwy 5R-23L   |      | A    |      |      |      |
| FAF to MAP 4.9 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 4:54 | 3:16 | 2:27 | 1:58 | 1:38 |