


WAAS CH 70302 W16A	APP CRS 161°	Rwy Ldg TDZE 192 Apt Elev 192
--	------------------------	---

RNAV (GPS) RWY 16L


WASHINGTON MANASSAS/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. ▲	MALSR AS	MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.
---	-------------	--

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 360.75	GND CON 121.8
------------------------	---	--	-------------------------

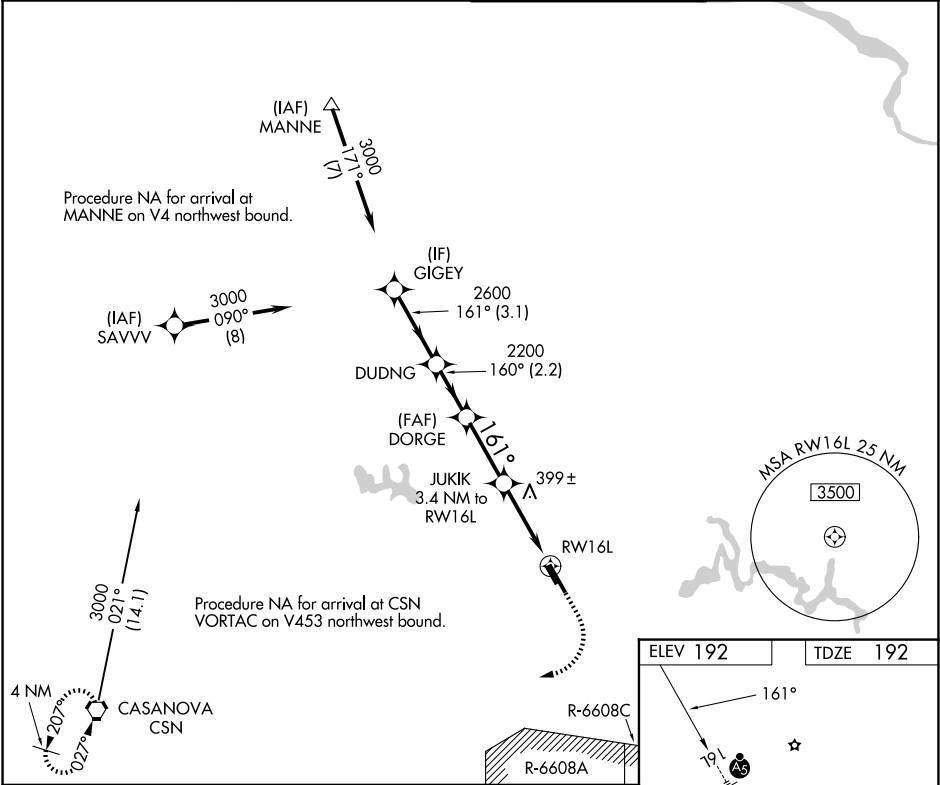

GIGEY		DUDNG		DORGE		700		3000		CSN	
3000		2600		2200		JUKIK		3.4 NM to RW16L		1.3 NM to RW16L	
GP 3.00°		161°		160°		161°		RW16L			
TCH 58		2200		1320							
		3.1 NM		2.2 NM		2.7 NM		2.1 NM		1.3 NM	
CATEGORY		A		B		C		D			
LPV DA				442-½		250 (300-½)					
LNAV/VNAV DA				642-⅞		450 (500-⅞)					
LNAV MDA		660-½		468 (500-½)		660-1		468 (500-1)			
CIRCLING		720-1		740-1		840-1¾		880-2¼			
		528 (600-1)		548 (600-1)		648 (700-1¾)		688 (700-2¼)			

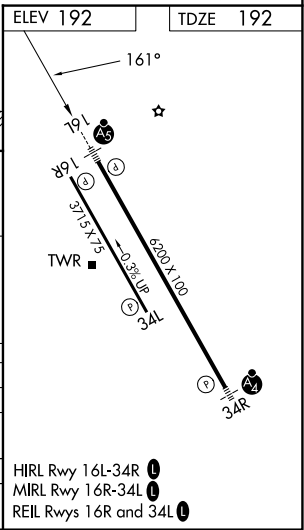

NE-3, 01 OCT 2026 to 29 OCT 2026

NE-3, 01 OCT 2026 to 29 OCT 2026