

WAAS CH 77810 W17A	APP CRS 162°	Rwy Ldg 5003 TDZE 117 Apt Elev 121
--	------------------------	---

RNAV (GPS) RWY 17


NATCHITOCHES RGNL (IER)

RNP APCH.

⚠ For uncompensated baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Alexandria Intl altimeter setting: Increase LPV DA to 458 feet and visibility all Cats 3/4 SM; increase LNAV/VNAV DA to 749 feet and visibility all Cats 3/4 SM; increase all MDA 100 feet and LNAV Cat C visibility 3/4 SM and Circling Cat C visibility 1/2 SM. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct SABVE and hold.

AWOS-3 119,025	MAKS APP CON 125.4 302.2	GCO 135,075	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------	----------------	---------------------------------

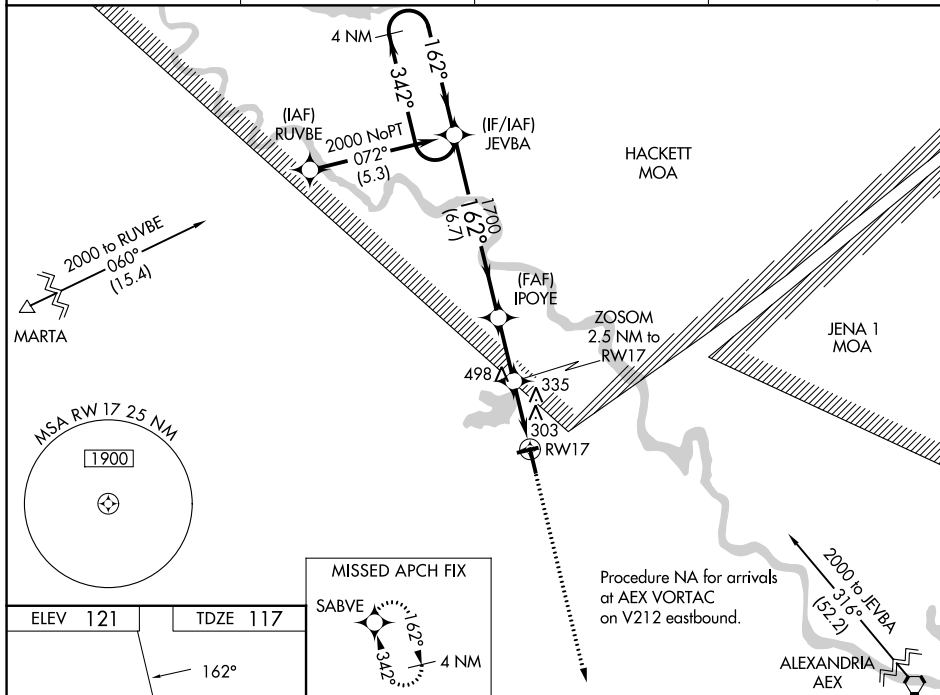

MIRMIL and REIL Instrument Landing Systems

Plan View (Left):

- MIRMIL Runways 7-25 and 17-35
- REIL Runways 7 and 17
- Runway 7: 4000 X 60
- Runway 17: 5003 X 150
- Runway 25: 4000 X 60
- Runway 35: 5003 X 150

Profile View (Right):

- Holding Pattern:** 4 NM, 2000 feet, 342°/162°
- Glidepath:** GP 3.00° TCH 45
- Final Approach:** 1700 feet, 162°
- Key Points:** JEVBA, IPOYE, ZOSOM, RW17
- Distances:** 6.7 NM, 2.3 NM, 1.1 NM, 1.4 NM
- Altitudes:** 2000, 1700, 940, 1700
- Angles:** 342°, 162°, 162°, 940°
- Notes:** VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 45), *LNAV only.

CATEGORY	A	B	C	D
LPV DA	367- ³ / ₄	250 (300- ³ / ₄)		NA
LNAV/VNAV DA	658-1 ⁷ / ₈	541 (600-1 ⁷ / ₈)		NA
LNAV MDA	620-1	503 (500-1)	620-1 ³ / ₈ 503 (500-1 ³ / ₈)	NA
CIRCLING	800-1	679 (700-1)	860-2 739 (800-2)	NA