

LOC/DME I-ARK 110.95 Chan 46 (Y)	APP CRS 185°	Rwy Ldg TDZE Apt Elev	9001 90 96
--	------------------------	-----------------------------	---------------------------------------

ILS or LOC RWY 17L

ORLANDO INTL (MCO)



RNAV 1-DME/DME/IRU or GPS or RADAR required for procedure entry. DME or RADAR required.

▼ Bright lights on highway midway between Rwy 17L and Rwy 17R may be mistaken for runway lights. Simultaneous approach authorized. For inop ALS, increase S-LOC 17L Cats C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on heading 100° and ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000.

D-ATIS 121.25	ORLANDO APP CON 124.8 307.0	118.45 253.5 124.3 253.5 (17L/35R, 17R/35L) (18L/36R, 18R/36L)	ORLANDO TOWER 126.4 (E) 121.8 (W)
-------------------------	---------------------------------------	---	---

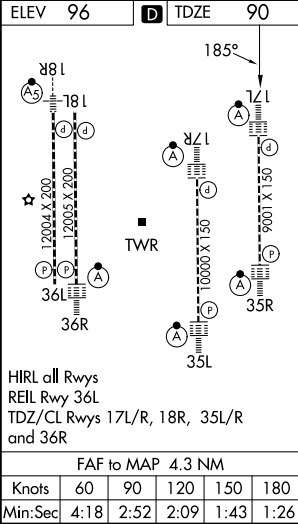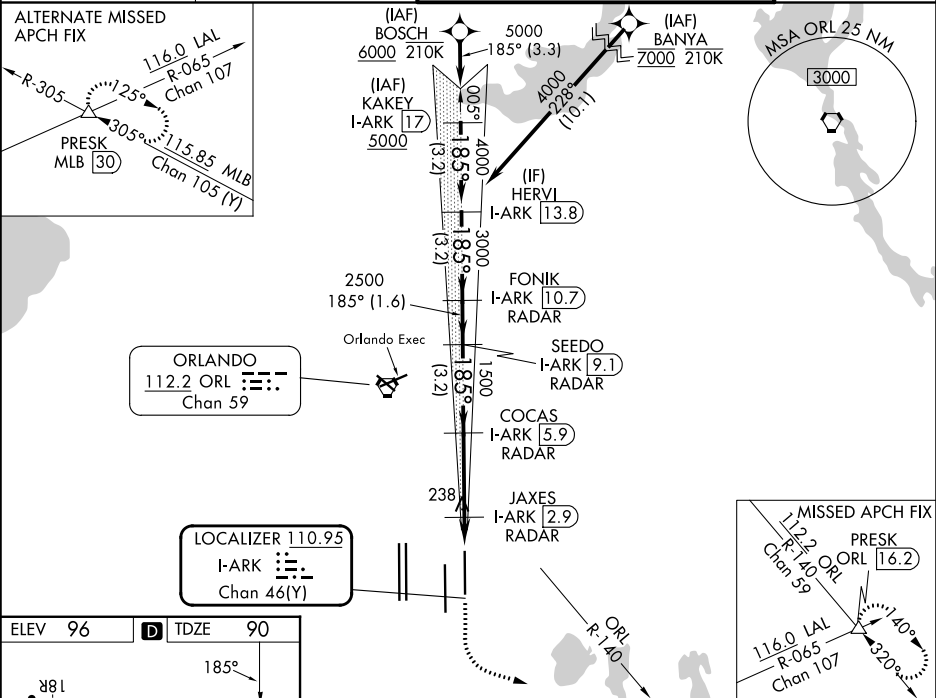

BOSCH	KAKEY	HERVI	FONIK	SEEDO	COCAS	JAXES	PRESK
I-ARK 17	I-ARK 13.8	I-ARK 10.7	I-ARK 9.1	I-ARK 5.9	I-ARK 2.9	I-ARK 1.7	
6000	5000	4000	3000	2500	1500	540	
GS 3.00° TCH 55							
3.3	3.2	3.2	1.6	3.2	3	1.3	
CATEGORY	A	B	C	D			
S-ILS 17L	290/18	200 (200-1/2)					
S-LOC 17L	500/24	410 (500-1/2)	500/40	410 (500-3/4)			
CIRCLING	740-1	644 (700-1)	740-134	740-2	644 (700-2)		