

LOC/DME I-MPV 108.7 Chan 24	APP CRS 168°	Rwy Ldg TDZE Apt Elev	5000 1135 1166
---	------------------------	-----------------------------	---



ILS or LOC RWY 17
EDWARD F KNAPP STATE (MPV)

 Inoperative table does not apply to S-LOC 17 Cats A and B. When local altimeter setting not received, procedure NA. Rwy 17 helicopter visibility reduction below $\frac{3}{4}$ SM.	 NA. Circling Rwy 5, 35 NA at night. For inoperative MALSR, increase S-LS 17 all Cats visibility to $\frac{1}{2}$ mile and WANUX fix minimums S-LOC 17 Cats A/B visibility to 1 mile and Cats C/D visibility to $\frac{1}{8}$ mile.
--	--



MISSED APPROACH: Climb to 5200 direct MPV VOR/DME and hold, continue climb-in-hold to 5200.

ASOS 132.675	BOSTON CENTER 135.7 282.2	UNICOM 122.8 (CTAF) 0
------------------------	-------------------------------------	---------------------------------

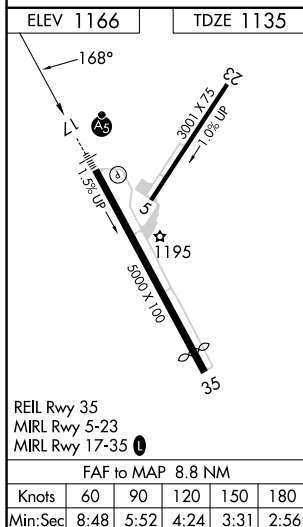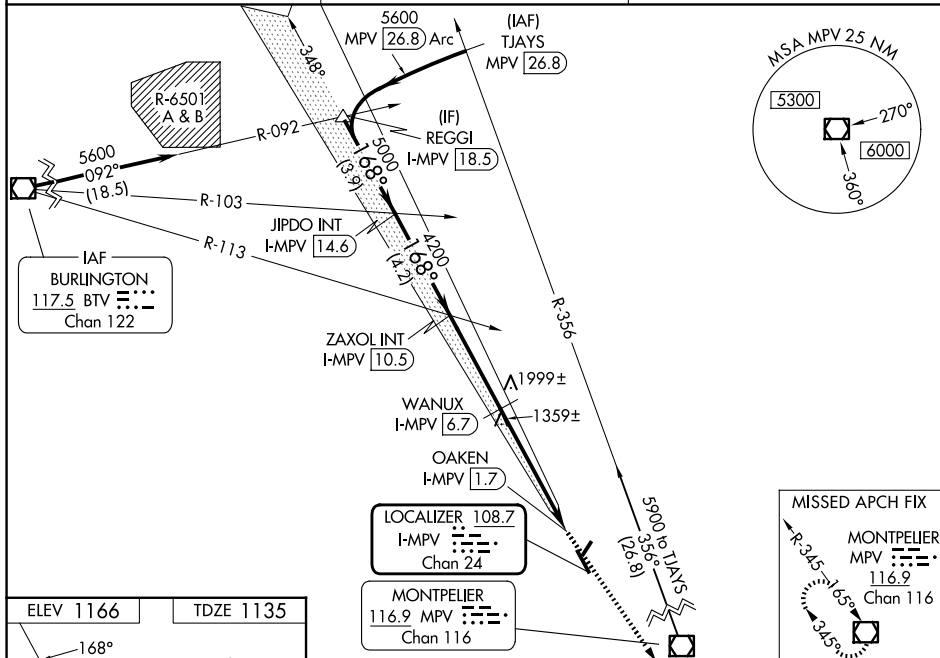

REGGI
I-MPV [18.5] JIPDO INT
I-MPV [14.6] ZAXOL INT
I-MPV [10.5] WANUX
I-MPV [6.7] WANUX
I-MPV [2.5] OAKEN
I-MPV [1.7] OAKEN

GS 3.00° TCH 50

Use I-MPV DME when on the Localizer course.

5600
5000
168°
4200
2980
3.9 NM
4.2 NM
3.8 NM
4.2 NM
0.8
0.8

CATEGORY	A	B	C	D
S-ILS 17	1486- ³ / ₄ 351 (400- ³ / ₄)			
S-LOC 17	2980-1 ¹ / ₄ 1845 (1900-1 ¹ / ₄)	2980-1 ¹ / ₂ 1845 (1900-1 ¹ / ₂)	2980-3	1845 (1900-3)
CIRCLING	2980-1 ¹ / ₄ 1814 (1900-1 ¹ / ₄)	2980-1 ¹ / ₂ 1814 (1900-1 ¹ / ₂)	2980-3	1814 (1900-3)

WANUX FIX MINIMUMS

S-LOC 17	1660- ³ / ₄	525 (500- ³ / ₄)	1660-1 ¹ / ₄	525 (500-1 ¹ / ₄)
CIRCLING	1980-1 ¹ / ₄	814 (900-1 ¹ / ₄)	2700-3 1534 (1600-3)	2920-3 1754 (1800-3)

EDWARD F KNAPP STATE (MPV)
ILS or LOC RWY 17