
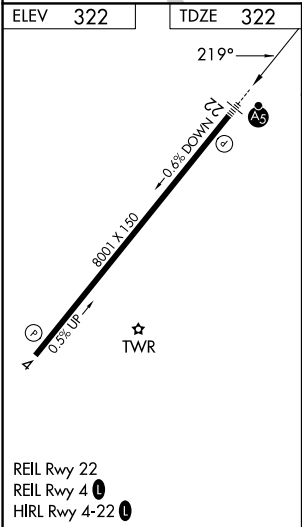


WAAS CH 86212 W22A	APP CRS 219°	Rwy Ldg TDZE 322 Apt Elev 322
--	------------------------	---

RNAV (GPS) RWY 22

MILLINGTON/MEMPHIS (NQA)

RNP APCH - GPS.				MALSRL	MISSED APPROACH: Climb to 840 then climbing right turn to 2500 direct ZIVNY and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1¾ SM, and LNAV Cat E visibility to 1¾ SM.					
AWOS-3 118.925	MEMPHIS APP CON 119.1 291.6 125.8 338.3 (176°-355°) (356°-175°)	MILLINGTON TOWER ★ 120.25 (CTAF) 0 340.2	GND CON 121.375	UNICOM 122.95	

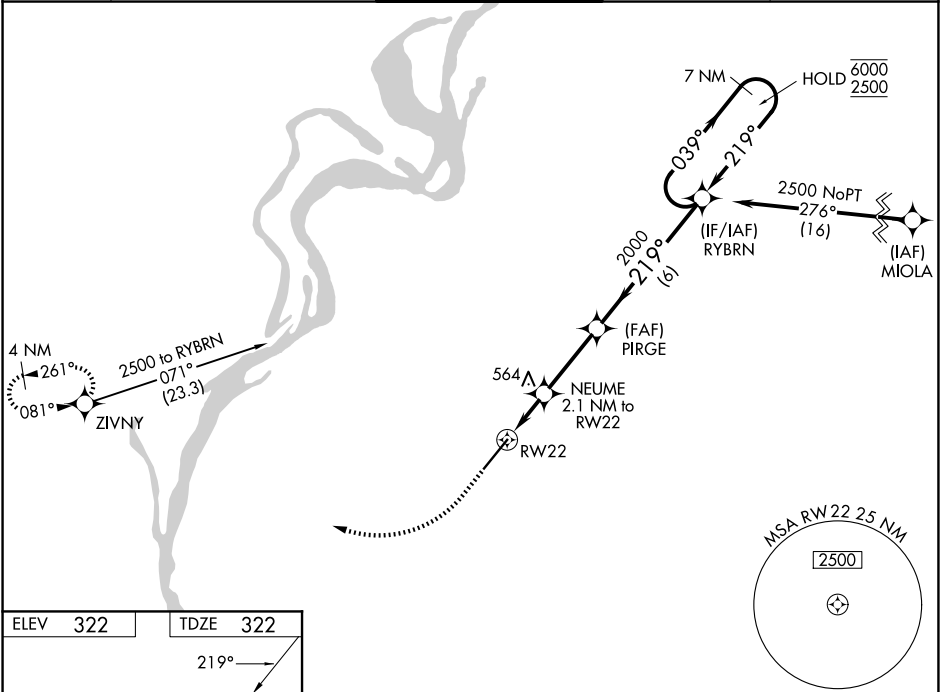

840		2500		ZIVNY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).		7 NM Holding Pattern	
		RW22		NEUME 2.1 NM to RW22		PIRGE 2000		RYBRN	
1.2 NM		1.2 NM to RW22		1040		2000		039°→ ←219°	
1.2 NM		0.9 NM		3 NM		6 NM		GP 3.00° TCH 55	
CATEGORY	A		B		C		D		E
LPV DA	522-½		200 (200-½)						
LNAV/ VNAV DA	784-1		462 (500-1)						
LNAV MDA	780-½		458 (500-½)		780-¾		458 (500-¾)		
CIRCLING	800-1 478 (500-1)		820-1 498 (500-1)		920-½ 598 (600-½)		960-2 638 (700-2)		960-2¼ 638 (700-2¼)