

WAAS CH 97512 W32A	APP CRS 324°	Rwy Ldg 5498 TDZE 715 Apt Elev 726
--	------------------------	---

RNAV (GPS) RWY 32
WINCHESTER RGNL (OKV)

RNP APCH.

▼ Baro-VNAV NA when using Martinsburg altimeter setting. For uncompensated Baro-VNAV systems, UNAV/VNAV NA below -16°C or above 47°C.

▲ Rwy 32 helicopter visibility reduction below ½ SM NA. When local altimeter setting not received, use Martinsburg altimeter setting and increase all DA 63 feet and all MDA 80 feet, and UNAV/VNAV all Cats and Circling Cat C visibility ½ mile. For inoperative MALSR, increase UNAV Cats A, B and C visibility to 1 mile and UNAV Cat D visibility to 1 ½ mile. Inoperative table does not apply to LPV. For inoperative MALSR when using Martinsburg altimeter setting, increase LPV all Cats and UNAV Cats A and B visibility to 1 mile. VDP NA when using Martinsburg altimeter setting.




MALSR




MISSED APPROACH:
Climb to 5000 direct
IMHEM and via track
018° to MEPEW and
hold, continue
climb-in-hold to 5000.

AWOS-3PT 124.85	POTOMAC APP CON 120.45 306.925	CLNC DEL 126.15	UNICOM 122.975 (CTAF) 0
---------------------------	--	---------------------------	-----------------------------------

MISSED APCH FIX
MFPFW

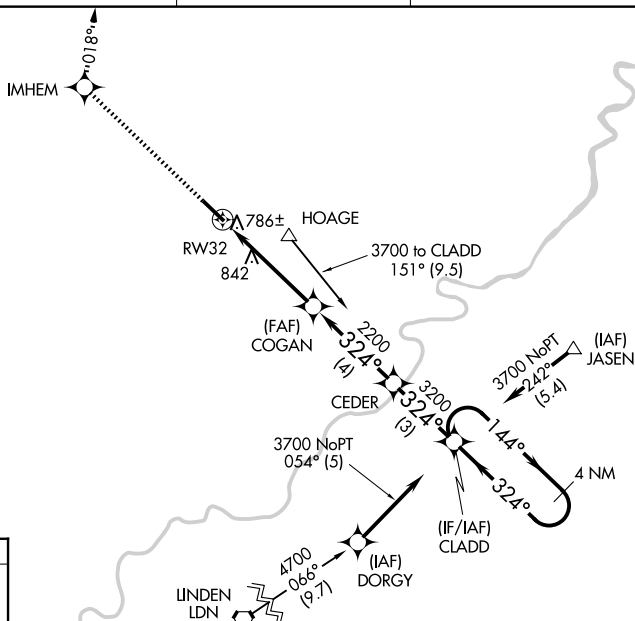

ELEV	726		TDZE	715
------	-----	--	------	-----



REIL Rwy 14 **L**
HIRL Rwy 14-32 **L**

5000 ↑	IMHEM ✱	tr 018°	MEPEW △	CLADD 4 NM Holding Pattern
*LNAV only	*1.1 NM to RW32	COGAN	CEDER	144° → ← 324° 3700
RW32	1.1	3.4 NM	4 NM	3 NM
				GP 3.00° TCH 44
2200	3200	324°		
CATEGORY	A	B	C	D
LPV DA	915-3/4 200 (200-3/4)			
LNAV/ VNAV DA	1056-3/4 341 (400-3/4)			
LNAV MDA	1100-3/4 385 (400-3/4)			1100-1 385 (400-1)
CIRCLING	1180-1 454 (500-1)	1220-1 494 (500-1)	1380-1 3/4 654 (700-1 3/4)	1480-2 1/2 754 (800-2 1/2)