

WAAS CH 86734 W09A	APP CRS 093°	Rwy Ldg TDZE 798 Apt Elev 809
--	------------------------	---

RNAV (GPS) RWY 9

WITTMAN RGNL (OSH)

RNP APCH - GPS.


▼

▲

Rwy 9 helicopter visibility reduction below ¾ SM NA. Circling Rwy 5, 23, 31 NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° C or above 54° C.
VDP and Baro-VNAV NA when using FLD altimeter setting. When local altimeter setting not received, use FLD altimeter setting: increase LPV DA to 1094 feet; increase LNAV/VNAV DA to 1174 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ½ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
PRIMO and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5(CTAF) 290.9	GND CON 132.3	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

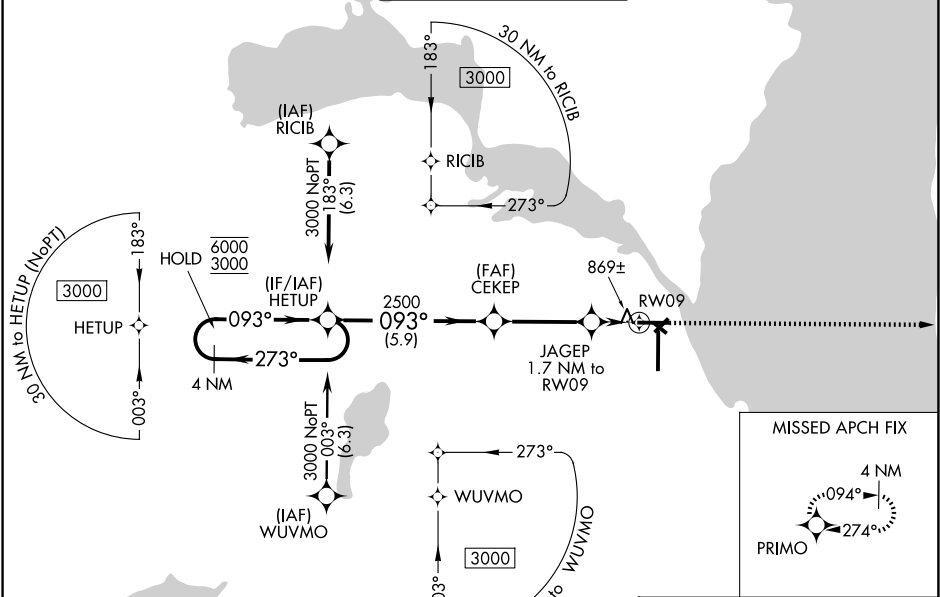

ELEV 809

D

TDZE 798

4 NM Holding Pattern	HETUP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).	3000	PRIMO
6000 3000	273° 093°	093° 2500	CEKEP 2500	JAGP 1.7 NM to RW09
GP 3.00° TCH 50			1380	1.2 NM to RW09
		5.9 NM	3.5 NM	0.5 1.2 NM

CATEGORY	A	B	C	D
LPV DA	1061-7/8 263 (300-7/8)			
LNAV/VNAV DA	1141-1 343 (400-1)			
LNAV MDA	1220-1 422 (500-1)	1220-1¼ 422 (500-1¼)		
CIRCLING	1280-1 471 (500-1)	1300-1 491 (500-1)	1360-1½ 551 (600-1½)	1440-2 631 (700-2)

TWR ★

REIL Rwy 18 and 27

HIRL Rwy 9-27 and 18-36