

HI-ILS or LOC RWY 10R


LOC/DME I-PDX 110.5 Chan 42	APCH CRS 103°	Rwy ldg 11,000 TDZE 24 Arpt Elev 31
---	-------------------------	--

AL-330 [USAF]

PORTLAND INTL (KPDX)

DME required.	ALSIF-2	MISSED APPROACH: Climb to 1100 then climbing right turn to 5000 on BTG VORTAC R-160 to MULES/BTG 17.7 DME and hold, continue climb-in-hold to 5000.
* When ALS inop, increase RVR to 40 and vis to ¾ mile.		

ATIS 128.35 269.9	APP CON 118.1 284.6 (100°-279°) 124.35 299.2 (280°-099°)	TOWER 118.7 257.8 Rwy 10L-28R 123.775 251.125 Rwy 3-21, 10R-28L	GND CON 121.9 348.6	CLNC DEL 120.125 318.1
-----------------------------	--	---	-------------------------------	----------------------------------

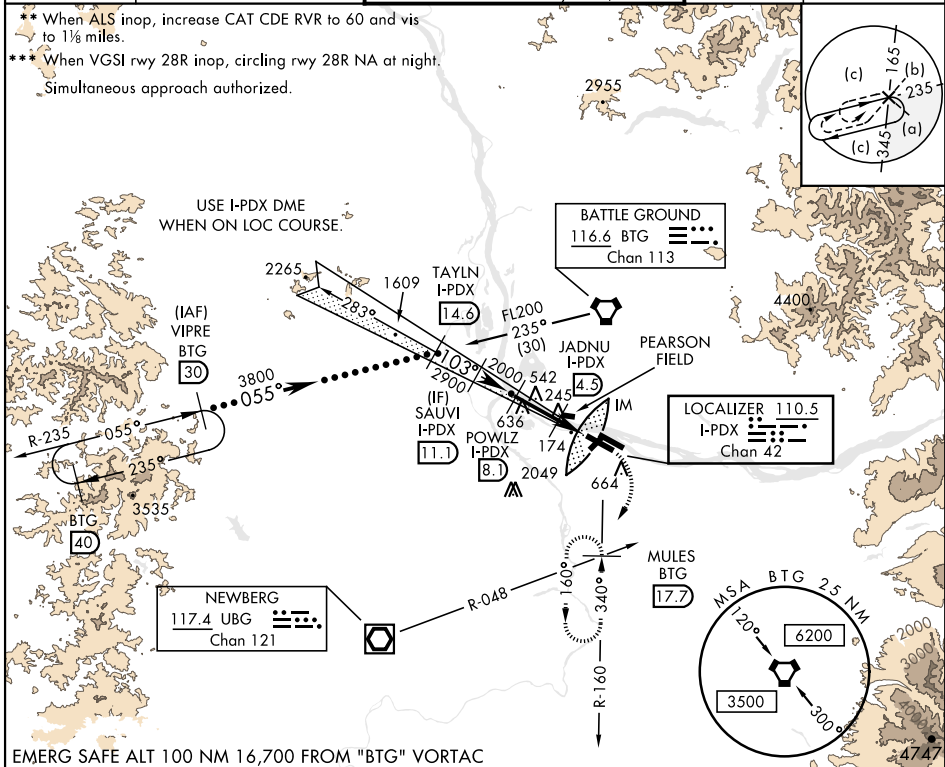

EMERG SAFE ALT 100 NM 16,700 FROM "BTG" VORTAC			ELEV 31		TDZE 24
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).			Rwy 10L ldg 8535' Rwy 28R ldg 9290'		Δ 424 ±
FL200 055° 3800 2900 2000			MULES BTG 17.7		
GS 3.00° TCH 53			LOC DME		
3.6 NM 2.4 NM 0.1			REIL Rwy 3-21 TDZL/CL Rwy 10R MIRL Rwy 3-21 HIRL Rwy 10L-28R, 28L-10R		
CATEGORY	C	D	E		
S-ILS 10R*	224/18	200	(200-¾)		
S-LOC 10R**	440/40	416	(500-¾)		
CIRCLING***	1060-3	1029 (1100-3)	1140-3 1109 (1200-3)		

HI-ILS or LOC RWY 10R