


|                                                                                                                                                                         |                                       |                                                                    |                                                                                             |                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| VOR HDF<br><b>112.05</b>                                                                                                                                                | APCH CRS<br><b>315°</b>               | Rwy Idg <b>13,302</b><br>TDZE <b>1497</b><br>Arpt Elev <b>1536</b> | AL-348 [USAF]                                                                               | MARCH ARB (KRIV)                                                                                                          |
| <b>▼</b> *When ALS inop, increase CAT AB RVR to 60 and vis to 1½ mile,<br>CAT CDE vis to 1½ miles.<br>** Circling not authorized NE of Rwy 14-32. Rapid rising terrain. |                                       |                                                                    | ALSF-1<br> | MISSED APPROACH: Climb to 5300 on<br>HDF VOR R-315 to TALPE, then turn left<br>direct HDF continue climb-in-hold to 3300. |
| ATIS<br><b>134.75 239.05</b>                                                                                                                                            | APP/DEP CON ★<br><b>133.5 306.975</b> | TOWER<br><b>127.65 253.5</b>                                       | GND CON<br><b>121.75 335.8</b>                                                              | CLNC DEL<br><b>127.775 268.7</b>                                                                                          |

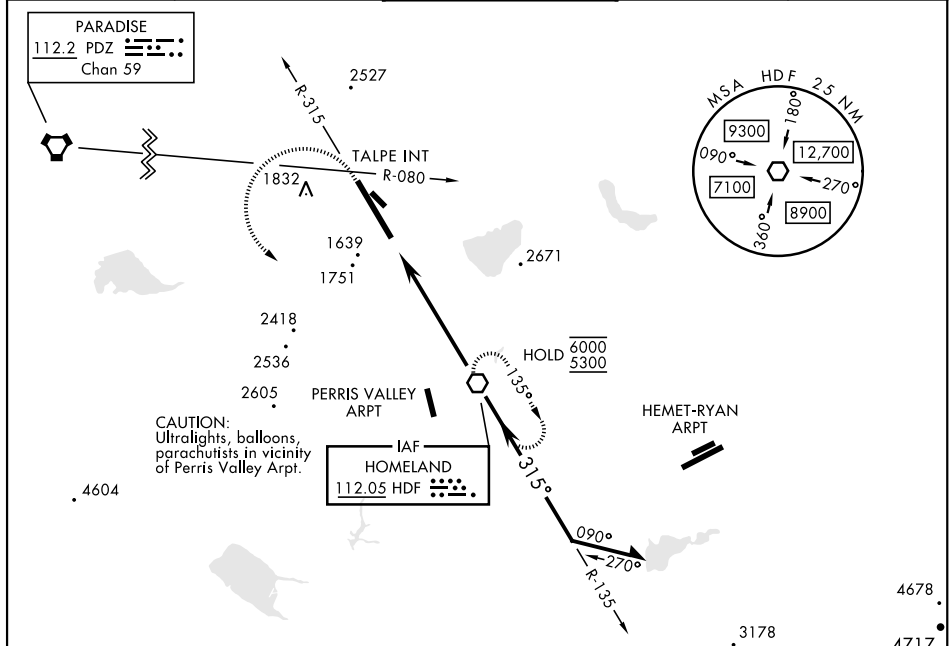

|         | FAF to MAP 5.2 NM |      |      |      |      |
|---------|-------------------|------|------|------|------|
| Knots   | 60                | 90   | 120  | 150  | 180  |
| Min:Sec | 5:12              | 3:28 | 2:36 | 2:05 | 1:44 |

EMERG SAFE ALT 100 NM 13,700

Diagram illustrating the Emergency Safe Altitude (ESA) procedure. The diagram shows a 3D perspective of a terrain profile with a 1 NM wide area. A 5.2 NM distance is marked along the ground. A 3700 ft altitude is indicated. A 135° angle is shown between the ground and the 5300 ft altitude. A 315° angle is shown between the ground and the 3700 ft altitude. A 3.29° angle is shown between the ground and the 5300 ft altitude. A 59° angle is shown between the ground and the 3700 ft altitude. A 1 NM distance is marked along the ground. A 5.2 NM distance is marked along the ground. A 3700 ft altitude is indicated. A 135° angle is shown between the ground and the 5300 ft altitude. A 315° angle is shown between the ground and the 3700 ft altitude. A 3.29° angle is shown between the ground and the 5300 ft altitude. A 59° angle is shown between the ground and the 3700 ft altitude.