

WAAS CH 58212 W01A	APP CRS 009°	Rwy Idg 5002 TDZE 473 Apt Elev 473
--	------------------------	---

RNAV (GPS) RWY 1


SAVANNAH-HARDIN COUNTY (SNH)

	RNP APCH - GPS
--	----------------

▼ LNAV/VNAV NA below -15°C or above 54°C. Rwy 1 helicopter visibility reduction below ¼ SM NA.
 ▲ NA When local altimeter setting not received, use Muscle Shoals. AL altimeter setting and increase all DA 102 feet and all MDA 120 feet and increase LPV and LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C visibility ¼ mile, Circling Cat B visibility ¼ mile and Circling Cat C visibility ½ mile. VDP NA when use Muscle Shoals altimeter setting.

MISSED APPROACH.
Climb to 3000 direct
YOSUB and hold.

AWOS-3 133.925	MEMPHIS CENTER 124.35 318.1	CTAF 122.8 0
--------------------------	---------------------------------------	------------------------

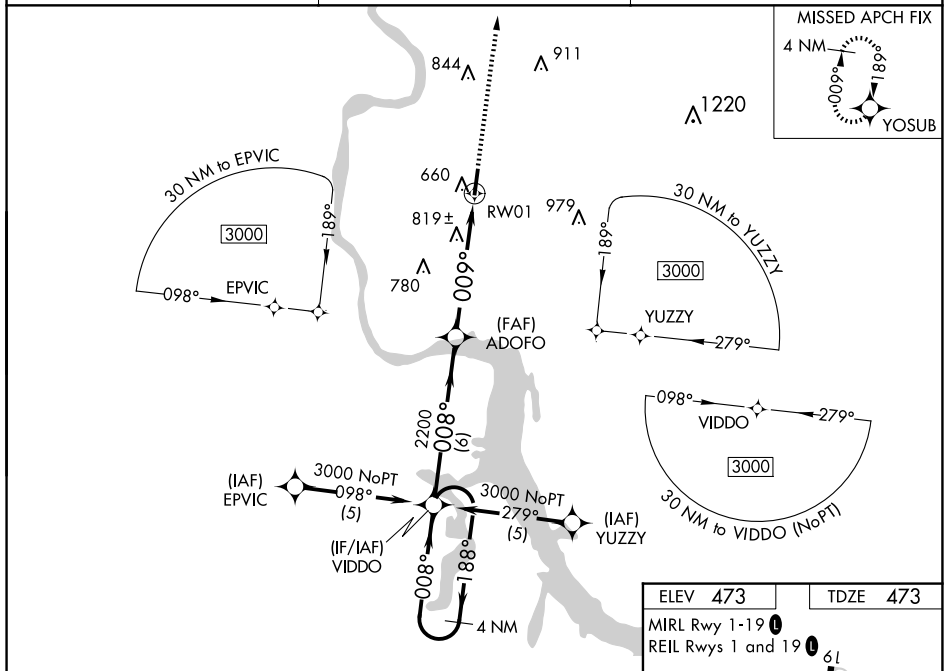

The diagram illustrates the YOSUB RNAV approach procedure. It begins at a holding pattern (4 NM) and proceeds through a series of waypoints: VIDDO, ADOFO, and RW01. The initial leg from the holding pattern to VIDDO is 3000 feet, with a heading of 188° outbound and 008° inbound. From VIDDO to ADOFO, the distance is 6 NM, with a heading of 008°. From ADOFO to RW01, the distance is 3.9 NM, with a heading of 009°. The final leg from RW01 to the runway is 1.3 NM, with a heading of 009°. The runway is labeled RW01. The diagram also indicates the VGSB and RNAV glidepath are not coincident, with a VGSB angle of 3.00° and TCH 28'. The YOSUB frequency is 3000 MHz.

CATEGORY	A	B	C	D
LPV DA	845-1 $\frac{1}{4}$	372 (400-1 $\frac{1}{4}$)		NA
RNAV/ VNAV DA	1188-2 $\frac{1}{2}$	715 (800-2 $\frac{1}{2}$)		NA
RNAV MDA	1080-1	607 (700-1)	1080-1 $\frac{3}{4}$ 607 (700-1 $\frac{3}{4}$)	NA
CIRCLING	1100-1	627 (700-1)	1140-1 $\frac{3}{4}$ 667 (700-1 $\frac{3}{4}$)	NA

