

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>78100</b><br><b>W23A</b> | APP CRS<br><b>226°</b> | Rwy Ldg <b>4200</b><br>TDZE <b>21</b><br>Apt Elev <b>21</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 23

TAMPA EXEC (VDF')

RNP APCH-GPS.

▼


▲

Inop table does not apply to LPV and LNAV Cat A/B. Baro-VNAV NA when using Tampa Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 323 feet, LNAV/VNAV DA to 513; increase all MDAs 40 feet, and LNAV and Circling Cat C visibilities ¼ SM. Circling Rwy 18, 36 NA at night.

MALSR

MISSED APPROACH:  
Climb to 800 then climbing left turn to 2700 direct to LAL VORTAC and hold.

|                          |                                     |                                        |
|--------------------------|-------------------------------------|----------------------------------------|
| AWOS-3<br><b>121.125</b> | TAMPA APP CON<br><b>119.9 290.3</b> | UNICOM<br><b>122.7</b> (CTAF) <b>0</b> |
|--------------------------|-------------------------------------|----------------------------------------|

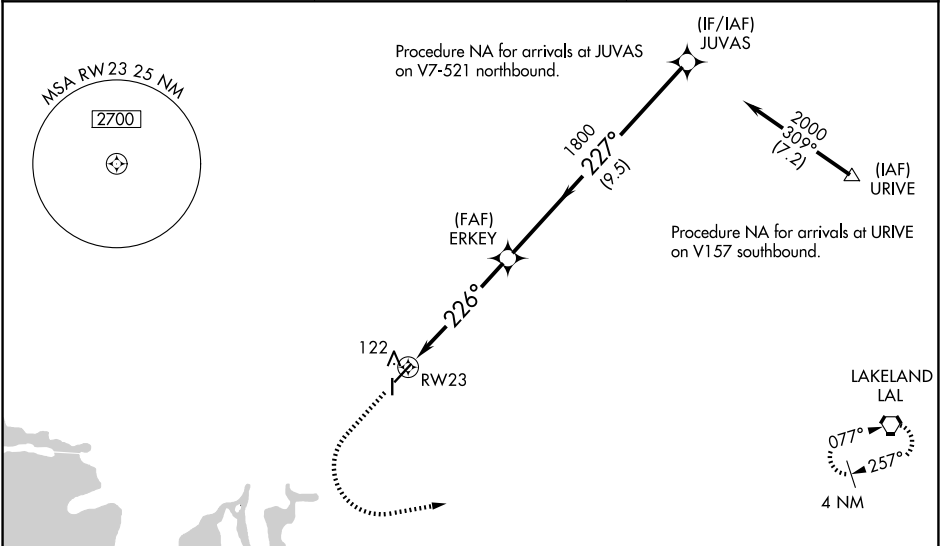

ELEV 21 D TDZE 21

REIL Rwys 5, 18, and 36  
MRL Rwys 5-23 and 18-36

|              |                      |                      |                        |    |
|--------------|----------------------|----------------------|------------------------|----|
|              | 800                  | 2700                 | LAL                    |    |
|              | ↑                    | ↶                    | ⬠                      |    |
|              | ERKEY                | JUVAS                | Procedure Turn NA      |    |
|              | 1800                 | 1800                 | GP 3.10°               |    |
|              | 226°                 | 227°                 | TCH 40                 |    |
|              | 5.3 NM               | 9.5 NM               |                        |    |
| CATEGORY     | A                    | B                    | C                      | D  |
| LPV DA       | 298-1                | 277 (300-1)          |                        | NA |
| LNAV/VNAV DA | 488-1½               | 467 (500-1½)         |                        | NA |
| LNAV MDA     | 560-1                | 539 (600-1)          |                        | NA |
| CIRCLING     | 560-1<br>539 (600-1) | 760-1<br>739 (800-1) | 800-2¼<br>779 (800-2¼) | NA |