BLOKR NINE DEPARTURE (RNAV)

CHICAGO DEP CON
119.35 354.075
D-ATIS
126.675
GND CON
120.425
LEWIS TOWER ★
134.8 (CTAF)

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

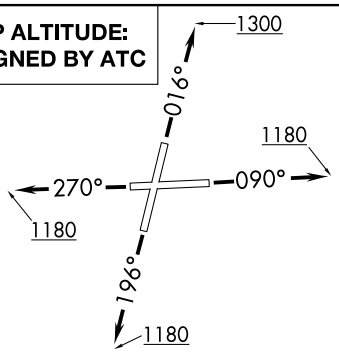

TAKEOFF MINIMUMS

Rwy 2: Standard with minimum climb of 420′/NM to 2700.
Rwy 9: Standard with minimum climb of 310′/NM to 2700.
Rwy 20: Standard with minimum climb of 370′/NM to 2700.
Rwy 27: Standard with minimum climb of 340′/NM to 2700.

NOTE: Turbojet departures maintain 250K until advised by ATC.

NOTE: ROBERTS Transition: For aircraft inbound to CMI or STL, or as assigned by ATC.



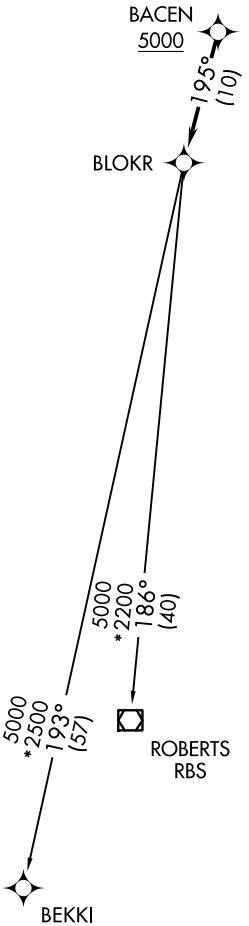

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb on heading 016° to 1300, for vectors to cross BACEN at or above 5000, thence. . . .
TAKEOFF RUNWAY 9: Climb on heading 090° to 1180, for vectors to cross BACEN at or above 5000, thence. . . .
TAKEOFF RUNWAY 20: Climb on heading 196° to 1180, for vectors to cross BACEN at or above 5000, thence. . . .
TAKEOFF RUNWAY 27: Climb on heading 270° to 1180, for vectors to cross BACEN at or above 5000, thence. . . .

. . . .on track 195° to BLOKR, then on transition, maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

BEKKI TRANSITION (BLOKR9.BEKKI):
ROBERTS TRANSITION (BLOKR9.RBS):

EC-3, 29 OCT 2026 to 26 NOV 2026