



NORCAL DEP CON
127.0 298.95
D-ATIS
133.775
CLNC DEL
121.1
CPDLC
GND CON
121.75 (12, 30)
121.9 (10L/R, 15, 28L/R, 33)
OAKLAND TOWER
118.3 291.65 (10L/R, 15, 28L/R, 33)
127.2 256.9 (12, 30)

RADAR required.

TOP ALTITUDE:
ASSIGNED BY ATC

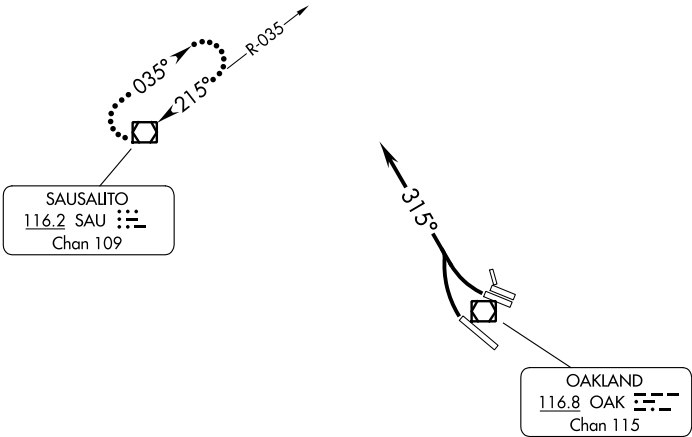

TAKEOFF MINIMUMS
Rwys 10L/R, 12, 15, 33: NA - Air traffic.
Rwys 28L/R, 30: Standard with minimum climb of 375'/NM to 2000.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R, 30: Climbing right turn heading 315° for RADAR vectors to assigned route/fix. Maintain ATC assigned altitude. Expect filed altitude 5 minutes after departure.

LOST COMMUNICATIONS: If not in contact with departure control after reaching 4000', proceed direct to SAU VOR/DME and hold on the SAU R-035. Climb in holding pattern to assigned altitude, then proceed to assigned fix/route.