


9Z02 \ON OCT 2026 to 26 NOV 2026 'Z-W-2

RADAR required.

TOP ALTITUDE:
ASSIGNED BY ATC


NORCAL DEP CON
135.1 307.2
D-ATIS
133.775
CLNC DEL
121.1
CPDLC
GND CON
121.75 (12, 30)
121.9 (10L/R, 15, 28L/R, 33)
OAKLAND TOWER
118.3 291.65 (10L/R, 15, 28L/R, 33)
127.2 256.9 (12, 30)

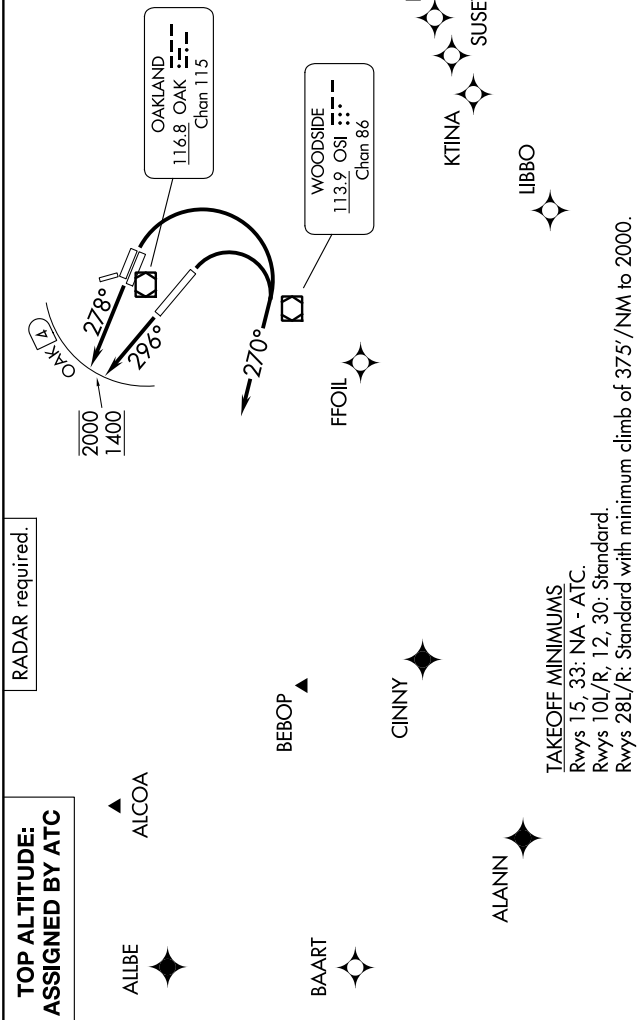

TAKEOFF MINIMUMS
Rwys 15, 33: NA - ATC.
Rwys 10L/R, 12, 30: Standard.
Rwys 28L/R: Standard with minimum climb of 375'/NM to 2000.

DEPARTURE ROUTE DESCRIPTION

▼ **TAKEOFF RUNWAYS 10L/R, 12:** Climbing right turn heading 270° for RADAR vectors to assigned route/fix, thence. . .
TAKEOFF RUNWAYS 28L/R: Climb on heading 278° for RADAR vectors to assigned route/fix. Cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000, thence. . .
TAKEOFF RUNWAY 30: Climb on heading 296° for RADAR vectors to assigned route/fix. Cross 4 DME northwest of OAK VOR/DME at or above 1400 and at or below 2000, thence. . .
... maintain ATC assigned altitude. Expect filed altitude 5 minutes after departure.



NOTE: Chart not to scale.