



APP CRS	Rwy Ldg	3721
125°	TDZE	1924
	Apt Elev	1924

RNAV (GPS) RWY 12

NEW TOWN MUNI (Ø5D)

RNP APCH - GPS.	MISSED APPROACH: Climb to 4500 direct SUSUE and hold.
▼ ▲ NA	Use 08D altimeter setting; when not received, use D60 altimeter setting and increase all MDAs 40 feet. Increase LNAV Cat C visibility 1/8 SM. Rwy 12 helicopter visibility reduction below 3/4 SM NA.

Ø8D AWOS-3 121.1	MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9 0
---------------------	-----------------------------------	-----------------

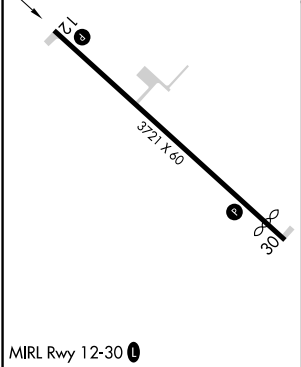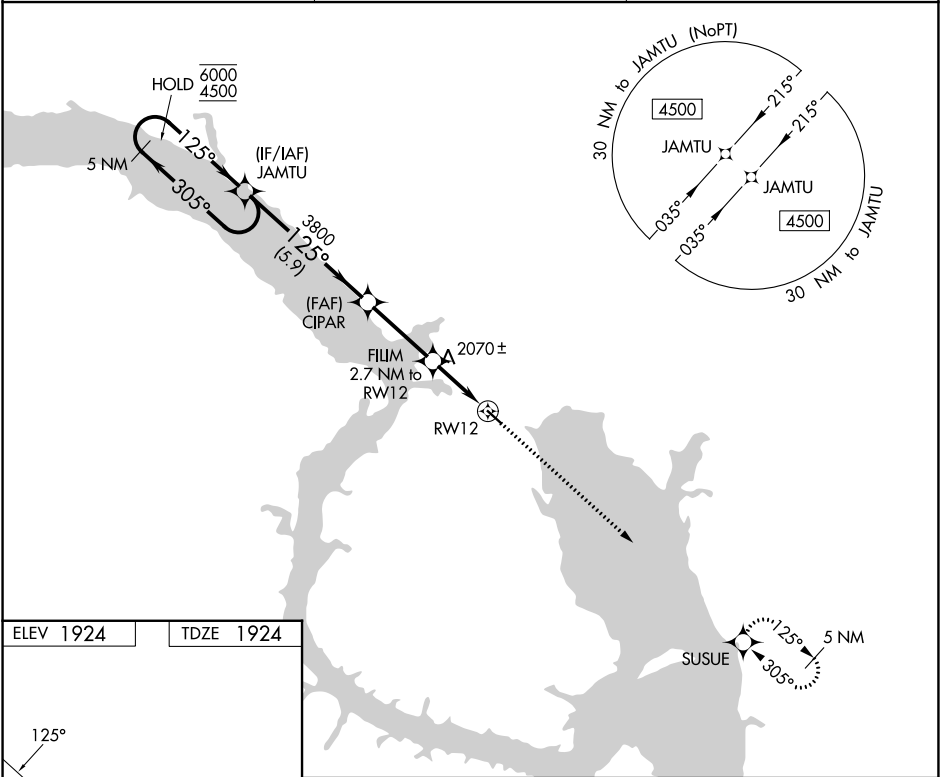

	5 NM Holding Pattern	JAMTU	CIPAR	FILM 2.7 NM to RW12	RW12	4500	SUSUE
	6000 4500	305° 125°	125°	3800 3.00° TCH 40	2800		
		5.9 NM	3.1 NM	2.7 NM			
CATEGORY	A	B	C	D			
LNAV MDA	2420-1	496 (500-1)	2420-1 3/8 496 (500-1 3/8)	NA			
CIRCLING	2500-1 576 (600-1)	2620-1 696 (700-1)	2760-2 1/2 836 (900-2 1/2)	NA			