

WAAS CH 72608 W12A	APP CRS 121°	Rwy Ldg 8500 TDZE 62 Apt Elev 73
--	------------------------	---

RNAV (GPS) RWY 12

RNP APCH-GPS


V For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C.
A For insop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV cat C visibility to RVR 5000 and increase LNAV Cat E visibility to 1% SM. When control tower closed, LPV, LNAV/VNAV and LNAV visibility RVR 5000. When control tower closed, insop table does not apply to LPV, LNAV/VNAV and LNAV Cats A/B.
✖ -24°C
 # RVR 1800 authorized with use of FD or AP or HUD to DA (NA when control tower closed)

MALSR



MISSED APPROACH:
Climb to 3000 direct
FELUM and on track
211° to JUTAN and
on track 272° to
OLLER and hold.

ATIS 128.8	ANCHORAGE CENTER 124.8 354.0	KING SALMON TOWER★ 118.3 279.5	GND CON 121.9	UNICOM 122.95	CTAF 121.90 352.05
---------------	---------------------------------	-----------------------------------	------------------	------------------	-----------------------

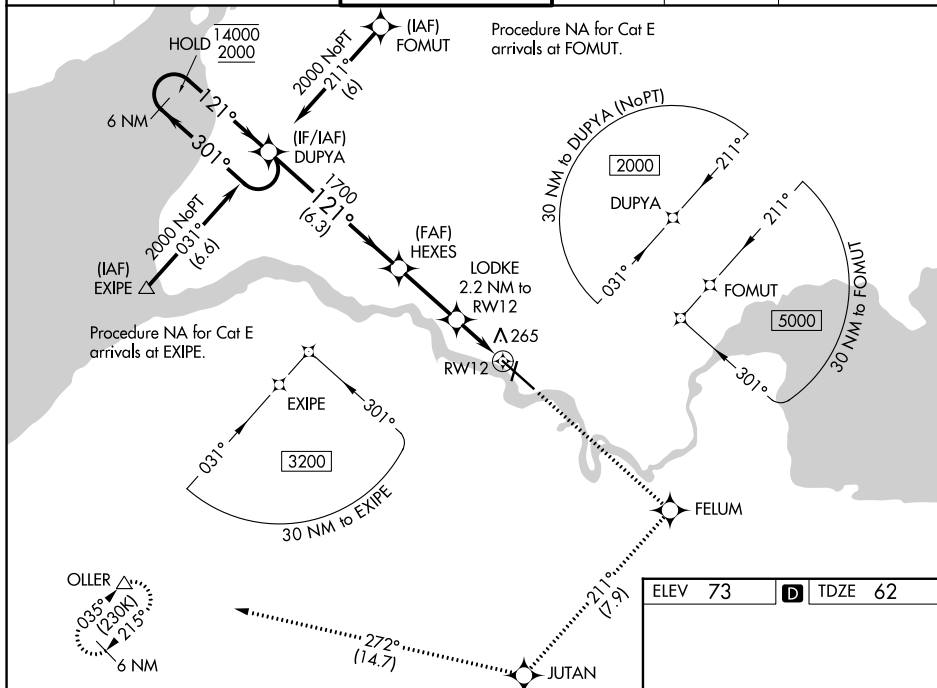

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).		6 NM Holding Pattern		DUPYA		3000 ↑		FELUM 		tr 211°		JUTAN 		tr 272°		OLLER △	
14000 2000		← 301° 121° →		1700		1700		1700		1700		1700		1700		1700	
GP 3.00° TCH 55		6.3 NM		2.8 NM		1 NM		1.2 NM		1.2 NM		1.2 NM		1.2 NM		1.2 NM	
CATEGORY		A		B		C		D		E		F		G		H	
LPV DA#		262/24		200 (200-1/2)		200 (200-1/2)		200 (200-1/2)		200 (200-1/2)		200 (200-1/2)		200 (200-1/2)		200 (200-1/2)	
LNAV/ VNAV		426/35		364 (400-5/8)		364 (400-5/8)		364 (400-5/8)		364 (400-5/8)		364 (400-5/8)		364 (400-5/8)		364 (400-5/8)	
LNAV MDA		520/24		458 (500-1/2)		520/45		458 (500-7/8)		458 (500-7/8)		458 (500-7/8)		458 (500-7/8)		458 (500-7/8)	
CIRCLING		580-1		507 (600-1)		580-1 1/2		900-2 3/4		960-3		507 (600-1 1/2)		827 (900-2 3/4)		887 (900-3)	

