


WAAS CH 77702 W28A	APP CRS 282°	Rwy Ldg TDZE Apt Elev	9763 2858 2872
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28L

BOISE AIR TRML/GOWEN FLD (BOI)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 6000 direct JIMMI and hold, continue climb-in-hold to 6000.
Circling NA north of Rwy 10L-28R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500, and LNAV/VNAV all Cats visibility to RVR 6000.		

D-ATIS 123.9 290.4	BIG SKY APP CON 119.6 269.4	BOISE TOWER 118.1 257.8	GND CON 121.7 348.6
------------------------------	---------------------------------------	-----------------------------------	-------------------------------

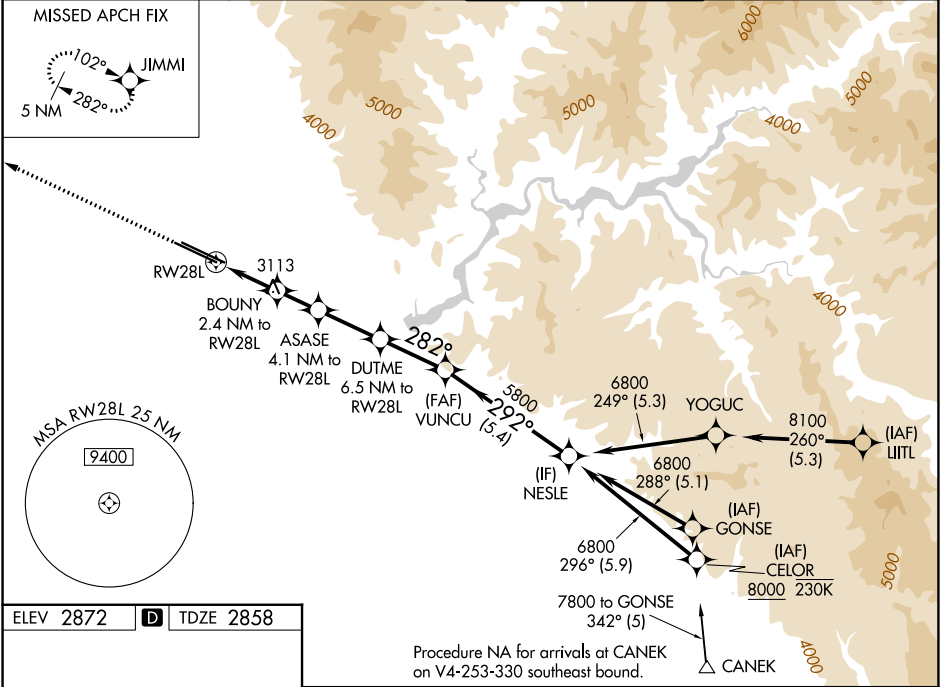

ELEV 2872	D	TDZE 2858
-----------	----------	-----------

REIL Rwy 10L TDZL/RCLS Rwy 10R and 28L HIRL Rwy 10L-28R and 10R-28L		6000 JIMMI VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50). ASASE DUTME VUNCU NESLE BOUNY ASASE DUTME VUNCU NESLE 1.4 NM to RW28L 2.4 NM to RW28L 4.1 NM to RW28L 6.5 NM to RW28L 5800 5800 5800 5800 6800 6800 6800 6800 8100			
3680 4200 4980 5800 6800		GP 3.00° TCH 50			
1.4 NM 1 NM 1.6 NM 2.5 NM 2.6 NM 5.4 NM					
CATEGORY		A	B	C	D
LPV DA		3160/24 302 (300-½)			
LNAV/VNAV DA		3267/40 409 (400-¾)			
LNAV MDA		3380/24 522 (600-½)		3380/55 522 (600-1)	
CIRCLING		3440-1 568 (600-1)		3640-2¼ 768 (800-2¼)	
				3820-3 948 (1000-3)	