

WAAS CH 42528 W24A	APP CRS 238°	Rwy Ldg 5000 TDZE 873 Apt Elev 876
--	------------------------	---

RNAV (GPS) RWY 24
CUYAHOGA COUNTY (CGT)


RNP APCH - GPS.



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLE altimeter setting. When local altimeter setting not received, use CLE altimeter setting and increase LPV DA to 1131 feet; increase LNAV/VNAV DA to 1263 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM. For inop ALS increase LNAV Cat C, D visibility to 1 1/8 SM.


MALSR


MISSED APPROACH:
Climb to 2500 then
climbing left turn to
3000 direct ZUPKO
and hold.

D-ATIS 119.95	CLEVELAND APP CON 125.35 346.325	COUNTY TOWER★ 127.95 (CTAF) 0	GND CON 121.85
-------------------------	--	---	--------------------------

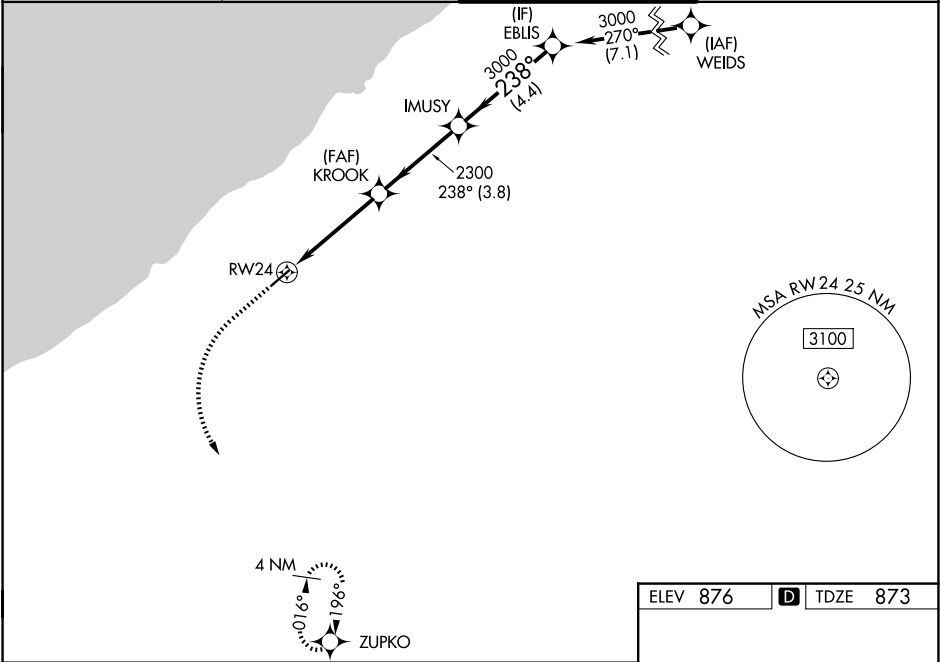

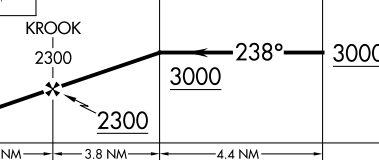					
					
1.1 NM		3.2 NM	3.8 NM	4.4 NM	
1.1 NM		3.2 NM	4.4 NM		
CATEGORY	A	B	C	D	
LPV DA	1073-1/2 200 (200-1/2)				
LNAV/VNAV DA	1205-1/2 332 (400-1/2)				
LNAV MDA	1280-1/2 407 (500-1/2)		1280-3/4 407 (500-3/4)		
CIRCLING	1420-1 544 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1640-2 1/2 764 (800-2 1/2)	

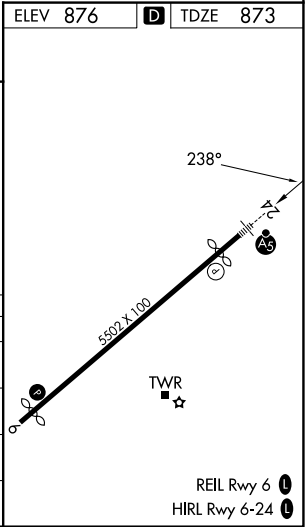

EC-2, 29 OCT 2026 to 26 NOV 2026

EC-2, 29 OCT 2026 to 26 NOV 2026