


WAAS CH 97320 W26A	APP CRS 255°	Rwy Ldg TDZE Apt Elev	4858 636 650
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 26R

CHINO (CNO)

RNP APCH-GPS.	MISSED APPROACH: Climb to 4000 direct IRUYI and via 241° track to LAHAB and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Helicopter visibility reduction below ¾ SM NA.	

ATIS 125.85	SOCAL APP CON 135.4 377.125	CHINO TOWER ★ 118.5 (CTAF) ①	GND CON 121.6	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------	-------------------------

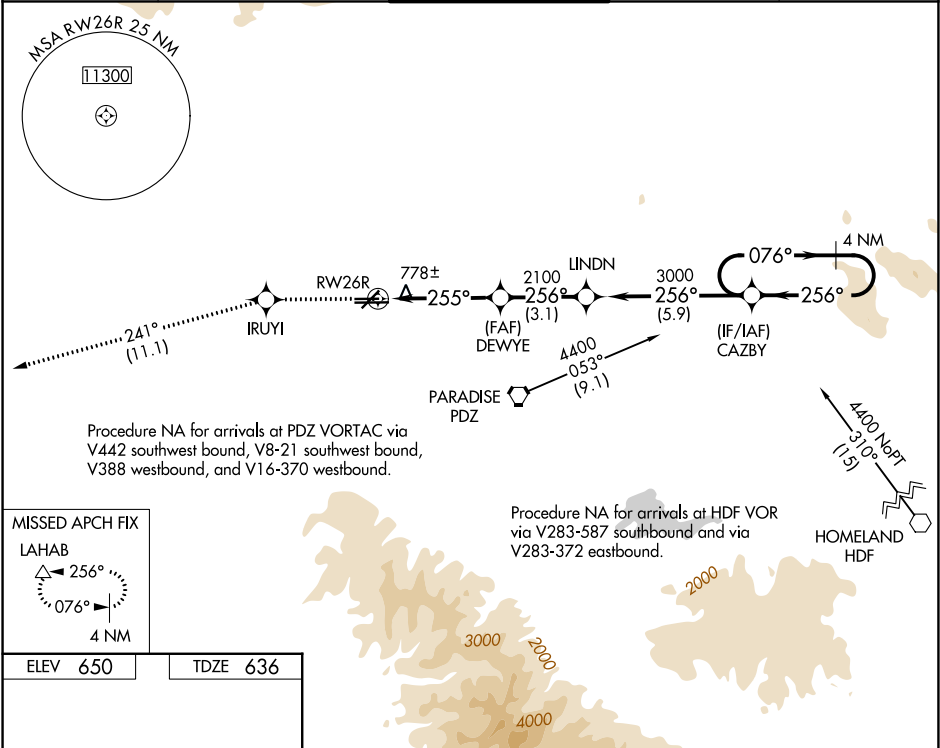

ELEV 650	TDZE 636	4000	IRUYI	LAHAB	CAZBY	4 NM Holding Pattern
		↑	★	△		
			tr 241°			
		*LNAV only.		DEWYE	LINDN	
		*1.8 NM to RWY 26R				
		RWY 26R		2100	3000	4400
		255°		256°	256°	076°
		1.8		2.6 NM	3.1 NM	5.9 NM
		0.4% UP		0.8% UP		
		TWIR		26R		
		4858 X 150		7000 X 150		
		8L BR		26L		
		MIRL Rwy 3-21 and 8R-26L ①		HIRL Rwy 8L-26R ①		
		REIL Rwy 3 and 21				
CATEGORY	A	B	C	D		
LPV DA	1030-1¼ 394 (400-1¼)					
LNAV/VNAV DA	1177-2 541 (600-2)					
LNAV MDA	1260-1 624 (700-1)		1260-1¾ 624 (700-1¾)		1260-2 624 (700-2)	
CIRCLING	1260-1¾ 610 (700-1¾)				1340-2¼ 690 (700-2¼)	