

WAAS
CH **69618**
W17A

APP CRS
172°

Rwy Ldg
TDZE **6187**
Apt Elev **6187**

RNAV (GPS) Y RWY 17L

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.

MALSR

AS

MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6
----------------------------	---	-------------------------------------	-------------------------------

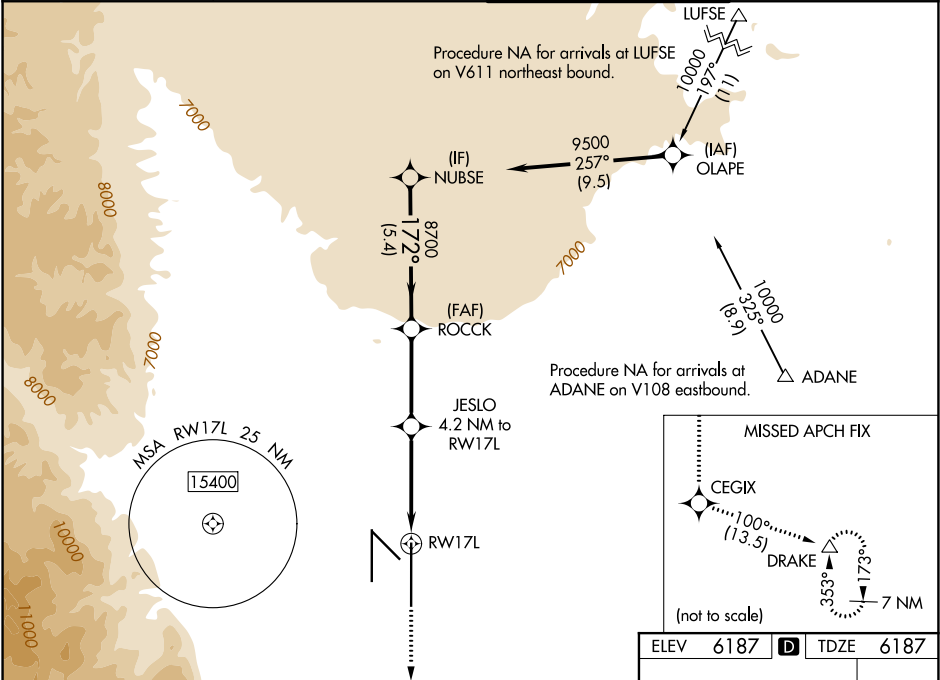

9000

CEGIX

tr 100°

DRAKE

ROCCK

NUBSE

JESLO 4.2 NM to RW17L

RW17L

2.4 NM to RW17L

1.8 NM

3.5 NM

5.4 NM

7580

8700

9500

172°

GP 3.00°

TCH 57

CATEGORY	A	B	C	D
LPV DA	6387/18		200 (200-½)	
LNAV/VNAV DA	6602/45		415 (500-¾)	
LNAV MDA	7000/24 813 (900-½)	7000/40 813 (900-¾)	7000-1⅞	813 (900-1⅞)
CIRCLING	7000-1¼ 813 (900-1¼)		7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

ELEV 6187

D

TDZE 6187

172°

17L

13500 X 150

0.6% DOWN

0.6% UP

35R

11022 X 150

0.5% DOWN

0.5% UP

35L

8270 X 150

0.3% DOWN

0.3% UP

17R

13500 X 150

0.6% DOWN

0.6% UP

35R

11022 X 150

0.5% DOWN

0.5% UP

35L

8270 X 150

0.3% DOWN

0.3% UP

17R

MIRL Rwy 13-31

HIRL Rwy 17R-35L and 17L-35R

REIL Rwy 13, 17R, 31 and 35R

TDZL/RCLS Rwy 17L and 35R