

APP CRS	Rwy Ldg	5494
355°	TDZE	197
	Apt Elev	202

RNAV (GPS) RWY 36

BEAUREGARD RGNL (DRI)

RNP APCH - GPS.


⚠

Circling Rwy 14 NA at night. Rwy 36 helicopter visibility reduction below ¾ SM NA. VDP NA when using POE altimeter setting. When local altimeter setting not recieved, use POE altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.

ODALS

MISSED APPROACH: Climb to 1900 direct LOUDR and hold.

AWOS-3PT 118.225	MAKS APP CON 123.7 261.3	UNICOM 122.8 (CTAF) 0
---------------------	-----------------------------	--------------------------

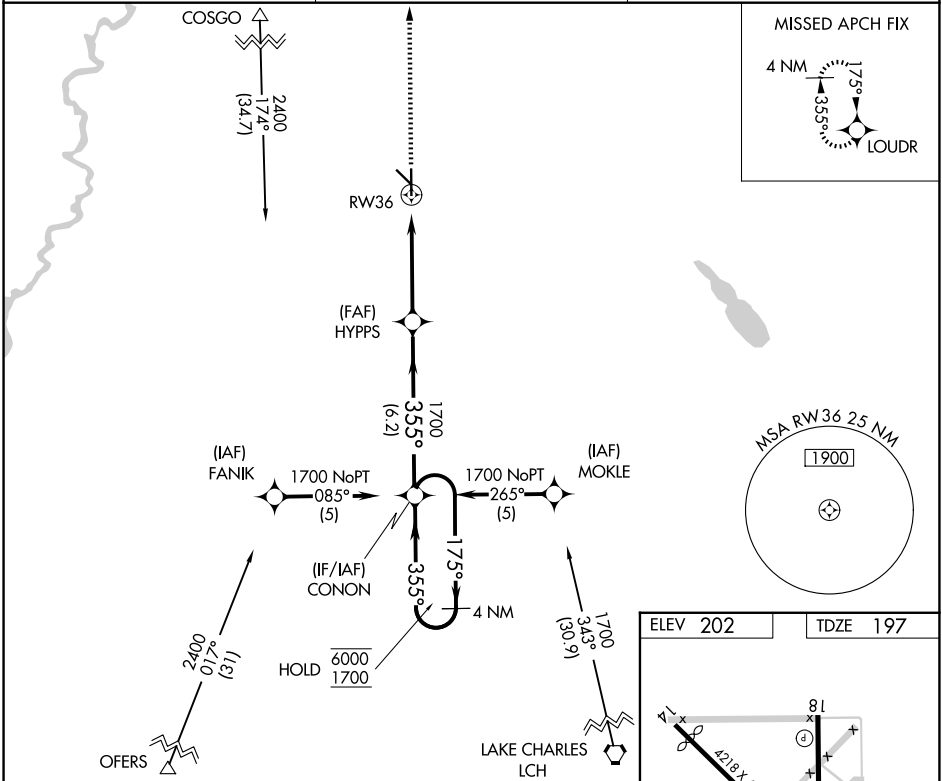

1900

LOUDR

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

4 NM Holding Pattern

HYPPS

CONON

1.3 NM to RW36

1700

355°

175°

6000

1700

3.04° TCH 40

1.3 NM

3.3 NM

6.2 NM

CATEGORY	A	B	C	D
LNAV MDA	660-¾	463 (500-¾)	660-1¼	463 (500-1¼)
CIRCLING	720-1	518 (600-1)	780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

REIL Rwy 18 0

MIRL Rwy 18-36 0

36

355°