

WAAS CH 86499	APP CRS 132°	Rwy Ldg TDZE 1002	6000
W13A		Apt Elev 1002	

RNAV (GPS) RWY 13

DEL RIO INTL (DRT)

RNP APCH - GPS

⚠

Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 1/8 SM. Circling NA for Cat D southwest of Rwy 13-31.

⚠

When local altimeter setting not received, use DLF altimeter setting: increase LPV DA to 1282 feet; increase LNAV/VNAV DA to 1431 feet; increase all MDAs 40 feet and LNAV visibility Cats C/D 1/8 SM and Circling visibility Cats C/D 1/4 SM.

W


Baro-VNAV NA when using DLF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17° C or above 54°C.

MALS


⦿

MISSED APPROACH: Climb to 4000 direct AREXE and on 069° track to DLF VORTAC and hold, continue climb-in-hold to 4000.

ASOS 118.525	DEL RIO APP CON ★ 119.6 259.1	CLNC DEL 120.5	UNICOM 122.8 (CTAF) 📶
------------------------	---	--------------------------	--

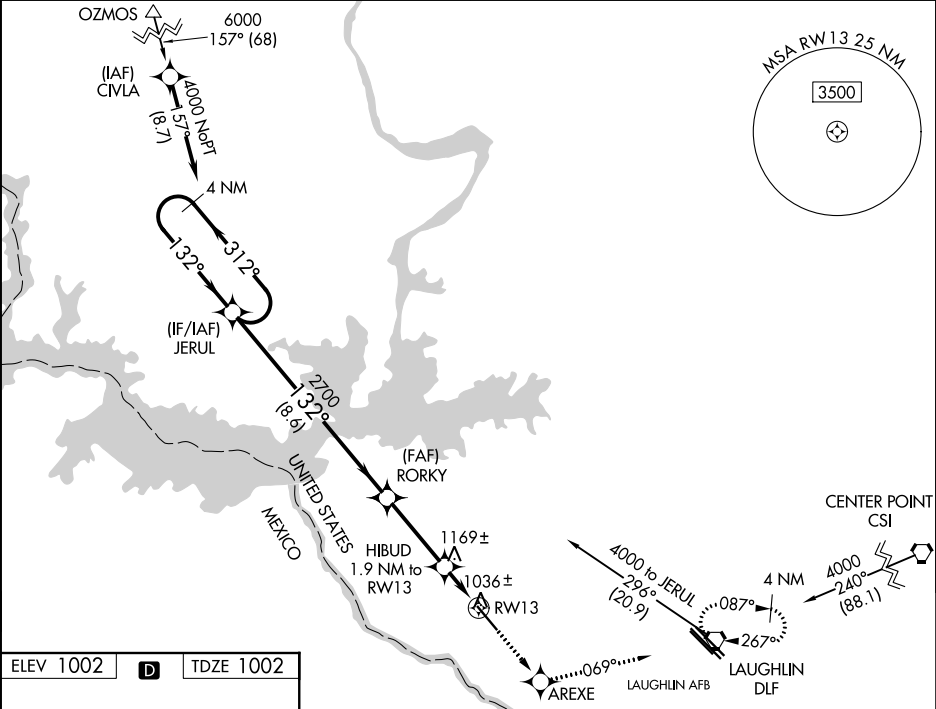

ELEV 1002	D	TDZE 1002
-----------	----------	-----------

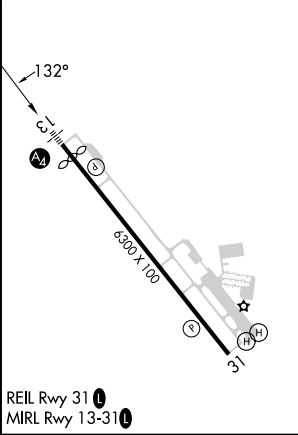

4 NM Holding Pattern		4000	AREXE	tr 069°	DLF
JERUL		RORKY	HIBUD	RW13	
4000 ← 312°		2700	1640		
GP 3.00° TCH 48		8.6 NM	3.2 NM	1.9	
CATEGORY	A	B	C	D	
LPV DA		1252-3/4	250 (300-3/4)		
LNAV/VNAV DA		1401-1	399 (400-1)		
LNAV MDA	1500-3/4 498 (500-3/4)		1500-1 1/8 498 (500-1 1/8)		
CIRCLING	1500-1 498 (500-1)	1560-1 558 (600-1)	1740-2 738 (800-2)	1740-2 1/4 738 (800-2 1/4)	