

ILS Y or LOC/DME Y RWY 6

LOC I-EDF <u>110.3</u>	APCH CRS 065°	Rwy Idg 10,001 TDZE 175 Arpt Elev 213
----------------------------------	-------------------------	--

[USAF]

ELMENDORF AFB (PAED)

T * When TDLZ/RCLS lights inop increase RVR to 24.
When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile.



MISSED APPROACH: Climb to 900, then climbing left turn to 3000 via EDF R-310 to HOBBS and hold.

ATIS ★ 124.3 273.5	ANCHORAGE APP CON 118.6 290.5	TOWER 127.2 352.05	GND CON 121.8 275.8	PAR
---	--	---	--	------------

**** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1¼ miles**

*** Circling not authoriz
S of Rwy 6-24.


**** Circling not authorized
SW of Rwy 6 and 35.

CAT E aircraft remain within 4.5 NM of runway when executing circling maneuver.

Missed approach requires use of RNAV or ATC RADAR monitoring.



CAUTION:
Descent gradient after FEDNO is greater than descent gradient between SEKKA and FEDNO.

CAUTION: Terrain rises rapidly to the S and E.

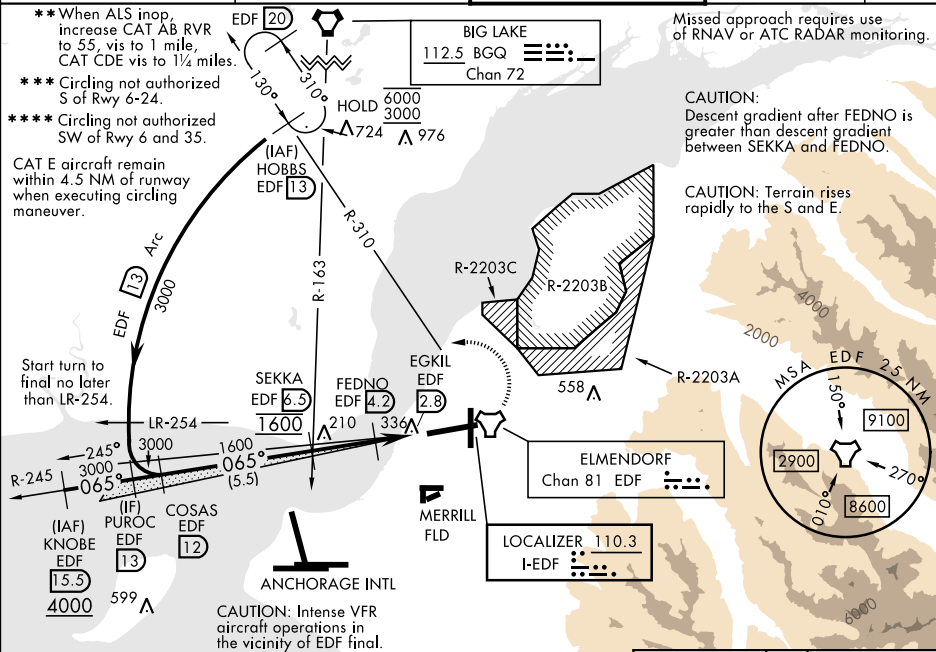

EMERG SAFE ALT 100 NM 15.300

VGSI and ILS glidepath not coincident
(VGSI Angle 3.00/TCH 77).

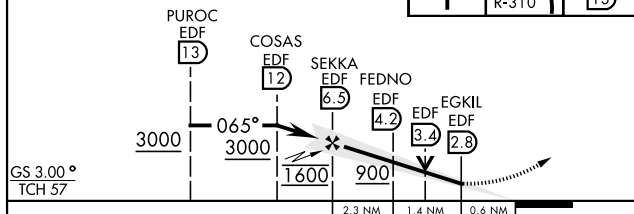

CATEGORY	A	B	C	D	E
S-LS 6 *	375/18		200	(200-1/2)	
S-LOC 6 **	600/24	425 (400-1/2)	600/40	425	(400-3/4)
CIRCLING ***	840-1	627 (700-1)	840-1 3/4 627 (700-1 3/4)	840-2 627 (700-2)	940-2 1/2 727 (800-2 1/2)
RWY 35 CIRCLING MINIMUMS					
CIRCLING ****	840-1	627 (700-1)	920-2 707 (800-2)	1020-2 1/2 807 (900-2 1/2)	1480-3 1267 (1300-3)

HIRL Rwy 6-24
TDZL/RCLS Rwy 6

