


TACAN RWY 6

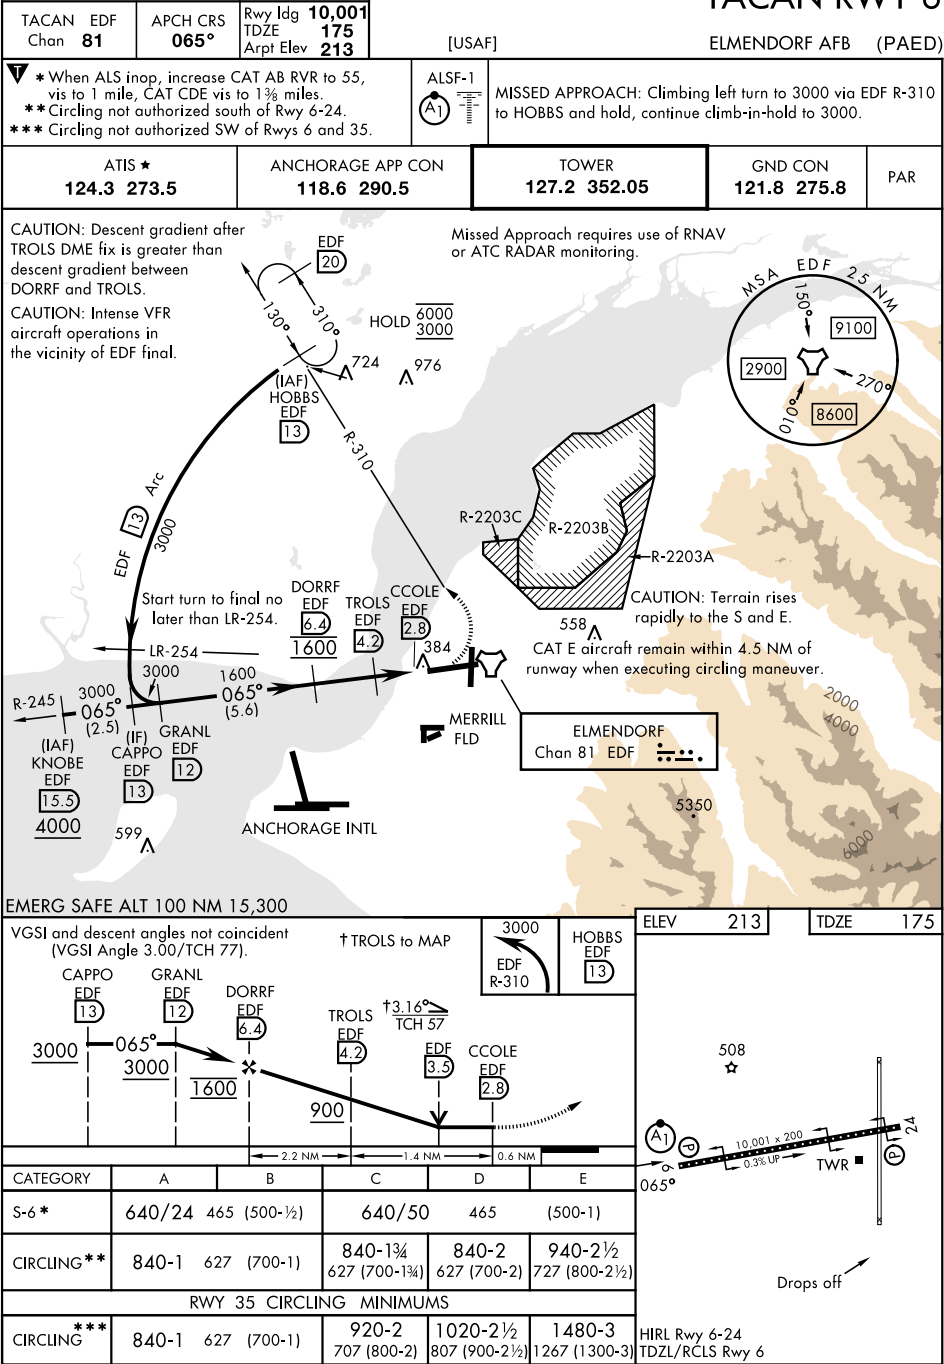

▼ When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1½ miles.
** Circling not authorized south of Rwy 6-24.
*** Circling not authorized SW of Rwy 6 and 35.

ALS F-1

A1

1000

500

0

MISSED APPROACH: Climbing left turn to 3000 via EDF R-310 to HOBBS and hold, continue climb-in-hold to 3000.

ATIS ★

124.3 273.5

ANCHORAGE APP CON

118.6 290.5

TOWER

127.2 352.05

GND CON

121.8 275.8

PAR

CAUTION: Descent gradient after TROLS DME fix is greater than descent gradient between DORRF and TROLS.

CAUTION: Intense VFR aircraft operations in the vicinity of EDF final.

Missed Approach requires use of RNAV or ATC RADAR monitoring.

EDF 20

130°

310°

HOLD 6000 3000

724

976

Δ

EDF 13

HOBBBS

EDF 13

R-310

3000

Arc

EDF 13

Start turn to final no later than LR-254.

LR-254

3000

1600

065° (5.6)

065° (2.5)

R-245

3000

(IAF) KNOBE EDF 15.5

4000

599

Δ

ANCHORAGE INTL

DORRF EDF 6.4

TROLS EDF 4.2

CCOLE EDF 2.8

384

Δ

R-2203C

R-2203B

R-2203A

558

Δ

CAUTION: Terrain rises rapidly to the S and E.

CAT E aircraft remain within 4.5 NM of runway when executing circling maneuver.

ELMENDORF Chan 81 EDF

5350

2000

4000

6000

MSA EDF 2.5 NM

150°

9100

2900

270°

8600

010°

EMERG SAFE ALT 100 NM 15,300

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 77).

↑ TROLS to MAP

3000

EDF R-310

EDF 13

HOBBBS EDF 13

3000

065°

3000

065°

1600

DORRF EDF 6.4

TROLS EDF 4.2

CCOLE EDF 2.8

EDF 3.5

900

2.2 NM

1.4 NM

0.6 NM

3.16° TCH 57

CATEGORY	A	B	C	D	E
S-6 *	640/24 465 (500-½)		640/50 465 (500-1)		
CIRCLING **	840-1 627 (700-1)		840-1¾ 627 (700-1¾)	840-2 627 (700-2)	940-2½ 727 (800-2½)
RWY 35 CIRCLING MINIMUMS					
CIRCLING ***	840-1 627 (700-1)		920-2 707 (800-2)	1020-2½ 807 (900-2½)	1480-3 1267 (1300-3)

HIRL Rwy 6-24

TDZL/RCLS Rwy 6

ELEV 213

TDZE 175

508

Δ

A1

10,001 x 200

0.3% UP

TWR

24

065°

Drops off

AK, 29 OCT 2026 to 24 DEC 2026

AK, 29 OCT 2026 to 24 DEC 2026

TACAN RWY 6