WAAS CH **99424** **W23A**	APP CRS **230°**	Rwy Ldg **5001** TDZE **847** Apt Elev **847**

RNAV (GPS) RWY 23


SHELBY-CLEVELAND COUNTY RGNL (EHO)

RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLT altimeter setting. Rwy 23 helicopter visibility reduction below ¾ NA. When local altimeter setting not received, use CLT altimeter setting and increase LPV DA to 1187 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1235 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 3000 direct ZISUG and hold.

AWOS-3	CHARLOTTE APP CON	UNICOM
118.425	**120.05 257.2**	**122.8** (CTAF) L

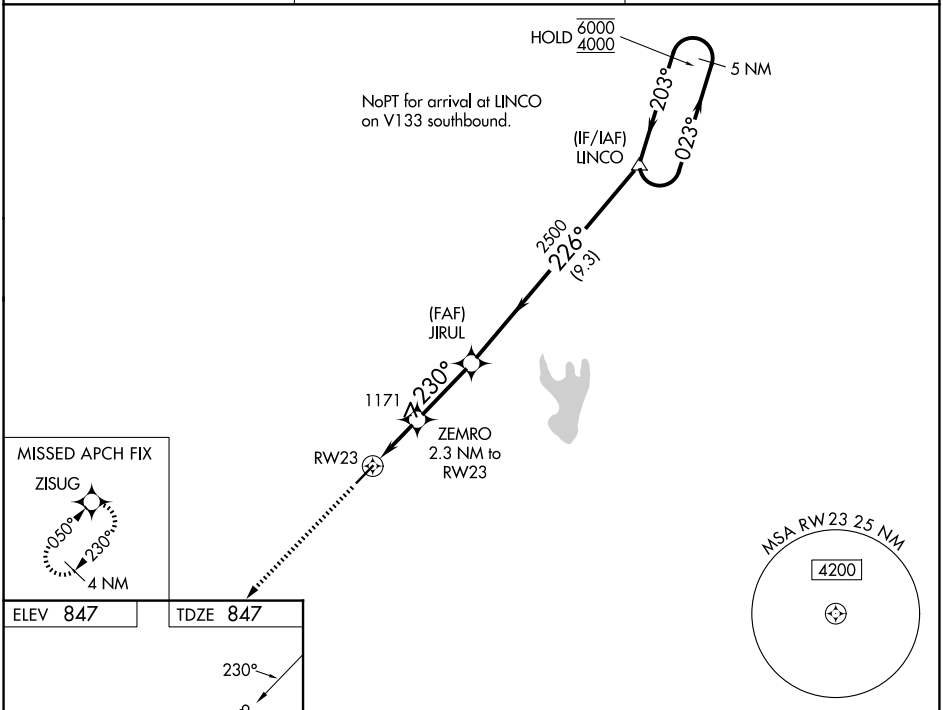

ELEV 847 TDZE 847



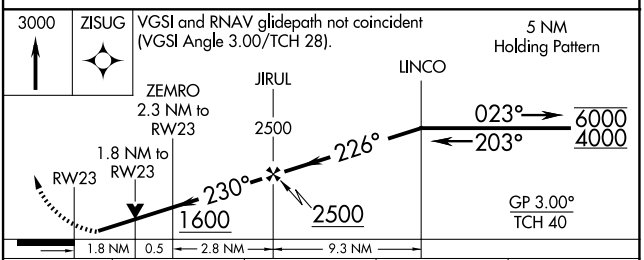

CATEGORY	A	B	C	D
LPV DA	1097-¾	250 (300-¾)		
LNAV/VNAV DA	1145-⅞	298 (300-⅞)		
LNAV MDA	1440-1	593 (600-1)	1440-1¾	593 (600-1¾)

MIRL Rwy 5-23 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026