

WAAS CH 61103 W27A	APP CRS 270°	Rwy Ldg 5998 TDZE 92 Apt Elev 112
--	------------------------	--

RNAV (GPS) RWY 27
ESLR RGNL (ESF)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using AEX altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling Rwy 14, 32 NA at night.


▲ When local altimeter setting not received, use AEX altimeter setting and increase LPV DA to 329 feet; increase LNAV/VNAV DA to 550 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 40 feet and LNAV visibility Cats C and D $\frac{1}{8}$ SM. and Circling visibility Cats C and D $\frac{1}{8}$ SM.

MALSR




MISSED APPROACH:
Climb to 3000 direct
HOVUS and on track
214° to AEX VORTAC
and hold, continue
climb-in-hold to 3000.

ASOS 119.425	MAKS APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------------	--

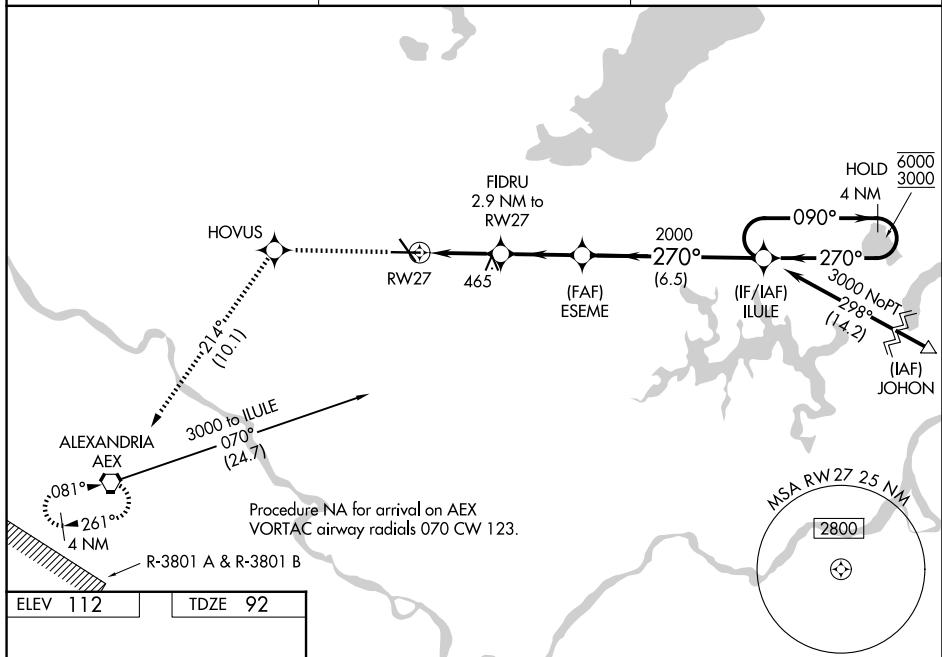

ELEV 112		TDZE 92
----------	--	---------



3000 ↑	HOVUS ✧	AEX ir 214° ◻					
			FIDRU 2.9 NM to RW27	ESEME 2000	ILULE	4 NM Holding Pattern	
			1.8 NM to RW27	1060	2000	090° → 6000 ← 270° 3000	GP 3.00° TCH 59
			1.8 NM	1.1 NM	2.9 NM	6.5 NM	
CATEGORY		A		B	C	D	
LPV DA				292-1½	200 (200-½)		
LNAV/VNAV DA				513-¾	421 (500-¾)		
LNAV MDA		720-½	628 (700-½)	720-1⅜ 628 (700-1⅜)			
CIRCLING		720-1	608 (700-1)	780-1¾ 668 (700-1¾)		780-2 668 (700-2)	

REIL Rwy 9, 14 and 32 **L**
MIRL Rwy 14-32 **L**
HIRL Rwy 9-27 **L**

ALEXANDRIA, LOUISIANA

Amdt 2C 29OCT26

31°24'N-92°18'W

ESLER RGNL (ESF)

RNAV (GPS) RWY 27