
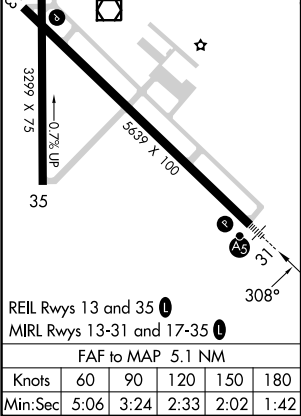


LOC I-FFM	APP CRS	Rwy Ldg	5639
111.5	308°	TDZE	1182
		Apt Elev	1182

ILS or LOC RWY 31

FERGUS FALLS RGNL (FFM)

ADF required.		MALSR 	MISSED APPROACH: Climb to 3000 then right turn direct HAMRE LOM/FFM 5.9 DME and hold.
 NA	Autopilot coupled approach NA below 1460. VDP NA when using Y63 altimeter setting. DME from FFM VOR/DME. DME use requires simultaneous reception of I-FFM and FFM DME. When local altimeter setting not received, use Y63 altimeter setting: increase S-ILS 31 DA to 1428 feet; increase all MDAs 60 feet and S-LOC 31 visibility Cat C/D 1/8 SM and Circling visibility Cat C/D 1/4 SM.		
AWOS-3PT 119.05		MINNEAPOLIS CENTER 126.1 269.2	
		UNICOM 122.8 (CTAF) 	

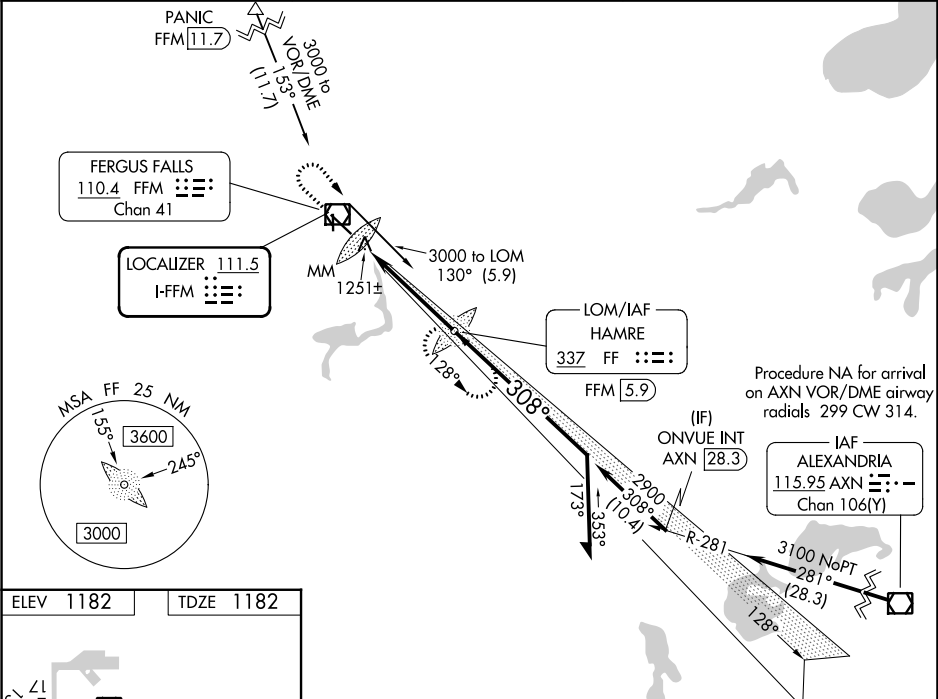

3000		FF		FF LOM HAMRE FFM 5.9		Remain within 10 NM	
3000		FFM 1.7		2852		128°	
FFM 0.8		MM		308°		3000	
0.4		0.5		4.2 NM		2900	
CATEGORY		A		B		C	
S-ILS 31		1382-½		200 (200-½)			
S-LOC 31		1520-½		338 (400-½)			
CIRCLING		1640-1 458 (500-1)		1740-1 558 (600-1)		1820-1¾ 638 (700-1¾)	
						1940-2½ 758 (800-2½)	