DAYTON, OHIO

ILS or LOC RWY 23R

LOC I-FFO	APCH CRS	Rwy ldg 12,602 THRE 821 Arpt Elev 821
109.7	233°	

[USAF] WRIGHT-PATTERSON AFB (KFFO)

DME or RADAR required for Localizer.

▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile.
**When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1⅜ miles.

ALSF-1


† MISSED APPROACH: Climb via FFO R-233 to 2000, at 3 DME turn left direct CLACK to 3000 and hold.

ATIS	COLUMBUS APP CON	PATTERSON TOWER	GND CON
124.475 269.9	118.85 269.275	127.8 281.45	121.8 335.8


*** When Rwy 23R VGSI inop, circling to Rwy 23R NA at night.

† Missed approach requires use of RNAV or ATC radar monitoring.


Autocoupled approach NA below 1458′ MSL.

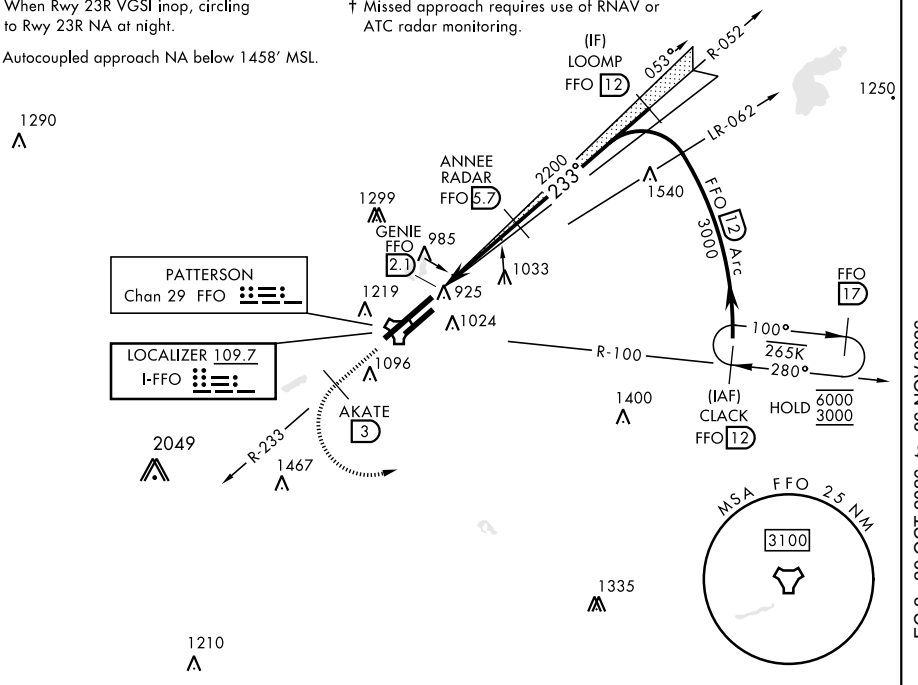

EMERG SAFE ALT 100 NM 3700

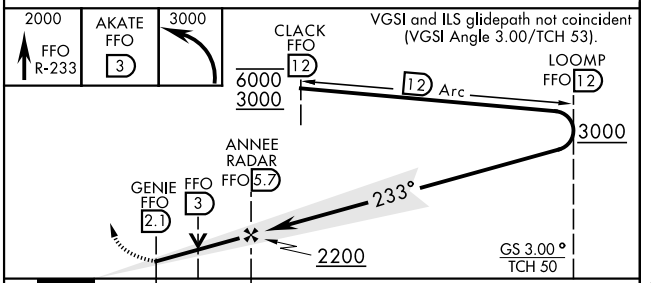

ELEV 821 THRE 821



CATEGORY	A	B	C	D	E
S-ILS 23R*	1023/24 200 (200-½)				
S-LOC 23R**	1320/24 497 (500-½)		1320/50 497 (500-1)		
CIRCLING***	1380-1 557 (600-1)	1440-1 617 (600-1)	1560-2 737 (800-2)	1620-2½ 797 (800-2½)	1620-2¾ 797 (800-2¾)

HIRL Rwy 5L-23R
MIRL Rwy 5R-23L

DAYTON, OHIO 39°50′N - 84°03′W WRIGHT-PATTERSON AFB (KFFO)

Amdt 7 10AUG23

ILS or LOC RWY 23R

EC-2, 29 OCT 2026 to 26 NOV 2026