

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>70302</b><br><b>W16A</b> | APP CRS<br><b>161°</b> | Rwy Ldg <b>6200</b><br>TDZE <b>192</b><br>Apt Elev <b>192</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

## RNAV (GPS) RWY 16L

WASHINGTON MANASSAS/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.

**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or  
**A** above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1 3/8 SM.


---

MALSR



**MISSED APPROACH:** Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

|                        |                                           |                                                  |                         |
|------------------------|-------------------------------------------|--------------------------------------------------|-------------------------|
| ATIS<br><b>125.175</b> | POTOMAC APP CON<br><b>128.525 306.925</b> | MANASSAS TOWER ★<br><b>133.1 (CTAF) 0 360.75</b> | GND CON<br><b>121.8</b> |
|------------------------|-------------------------------------------|--------------------------------------------------|-------------------------|

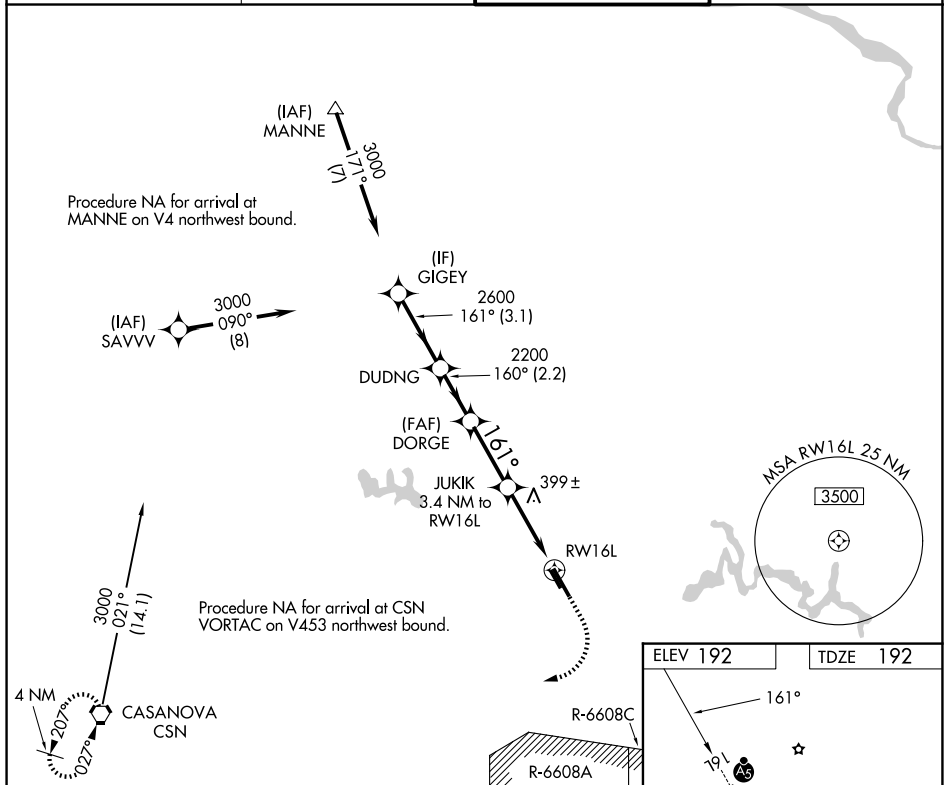

|              |  |                      |                      |                        |                        |
|--------------|--|----------------------|----------------------|------------------------|------------------------|
|              |  |                      |                      |                        |                        |
| CATEGORY     |  | A                    | B                    | C                      | D                      |
| LPV DA       |  | 442-1½ 250 (300-½)   |                      |                        |                        |
| LNAV/VNAV DA |  | 642-7⁄8 450 (500-⁄⁄) |                      |                        |                        |
| LNAV MDA     |  | 660-1½ 468 (500-½)   | 660-1 468 (500-1)    |                        |                        |
| CIRCLING     |  | 720-1<br>528 (600-1) | 740-1<br>548 (600-1) | 840-1¾<br>648 (700-1¾) | 880-2¼<br>688 (700-2¼) |

