


WAAS CH 56239 W34B	APP CRS 326°	Rwy Ldg 3715 TDZE 182 Apt Elev 192
--	------------------------	---

RNAV (GPS) RWY 34L

WASHINGTON MANASSAS/HARRY P DAVIS FLD (HEF)

	DME/DME RNP-0.3 NA. When local altimeter setting not received, use Washington Dulles Intl altimeter setting and increase all MDA 60 feet; increase LNAV Cat C/D and Circling Cat C and D visibility 1/4 mile. Helicopter visibility reduction below 3/4 SM NA.	MISSED APPROACH: Climbing left turn to 3000 direct CSN VORTAC and hold.
---	---	---

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8
------------------------	---	--	-------------------------

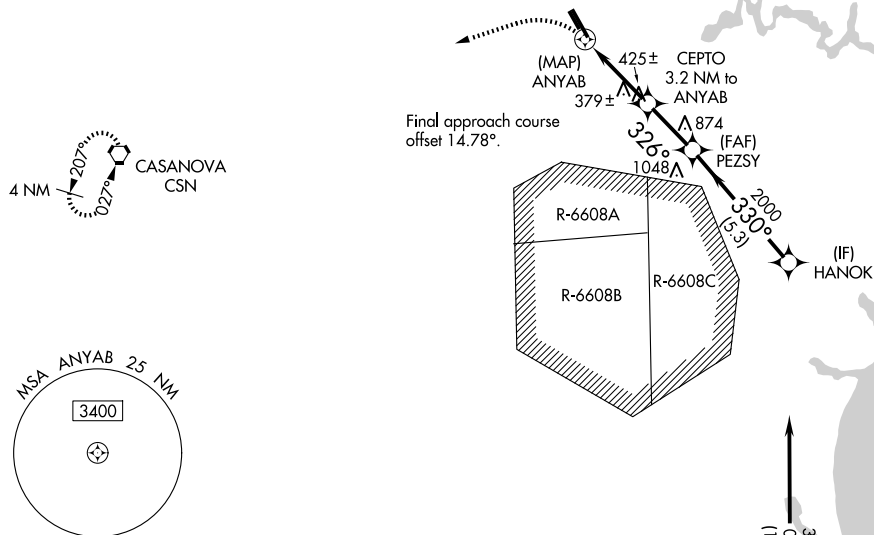

ELEV 192		TDZE 182
----------	--	----------

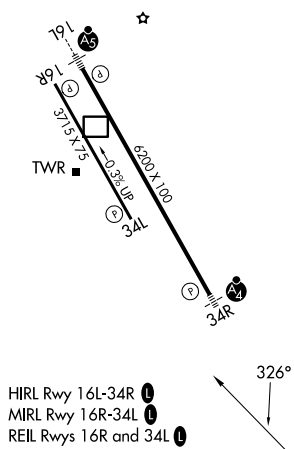


Diagram illustrating the proposed navigation system. The path is divided into four categories (A, B, C, D) with distances and altitudes marked. Key points include ANYAB, CEPTO, PEZSY, and HANOK. The path is labeled with angles 326° and 330°, and a distance of 1260 NM. The path is also labeled with 'VGS1 and descent angles not coincident (VGS1 Angle 3.00/TCH 43)' and 'VGS1 Angle 3.00/TCH 43'.

CATEGORY	A	B	C	D
LP MDA	640-1	458 (500-1)	640-1 $\frac{3}{4}$	458 (500-1 $\frac{3}{4}$)
LNAB MDA	680-1	498 (500-1)	680-1 $\frac{3}{4}$	498 (500-1 $\frac{3}{4}$)
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1 $\frac{3}{4}$ 648 (700-1 $\frac{3}{4}$)	880-2 $\frac{1}{4}$ 688 (700-2 $\frac{1}{4}$)

NE-3, 29 OCT 2026 to 26 NOV 2026