

WAAS CH 77810 W17A	APP CRS 162°	Rwy Ldg 5003 TDZE 117 Apt Elev 121
--	------------------------	---

RNAV (GPS) RWY 17

NATCHITOCHES RGNL (IER)

RNP APCH.

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

▲

Visibility reduction by helicopters NA. When local altimeter setting not received, use Alexandria Intl altimeter setting: Increase LPV DA to 458 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 749 feet and visibility all Cats ¾ SM; increase all MDA 100 feet and LNAV Cat C visibility ¾ SM and Circling Cat C visibility ½ SM. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct SABVE and hold.

AWOS-3 119.025	MAKS APP CON 125.4 302.2	UNICOM 122.8 (CTAF) 0
--------------------------	------------------------------------	---------------------------------

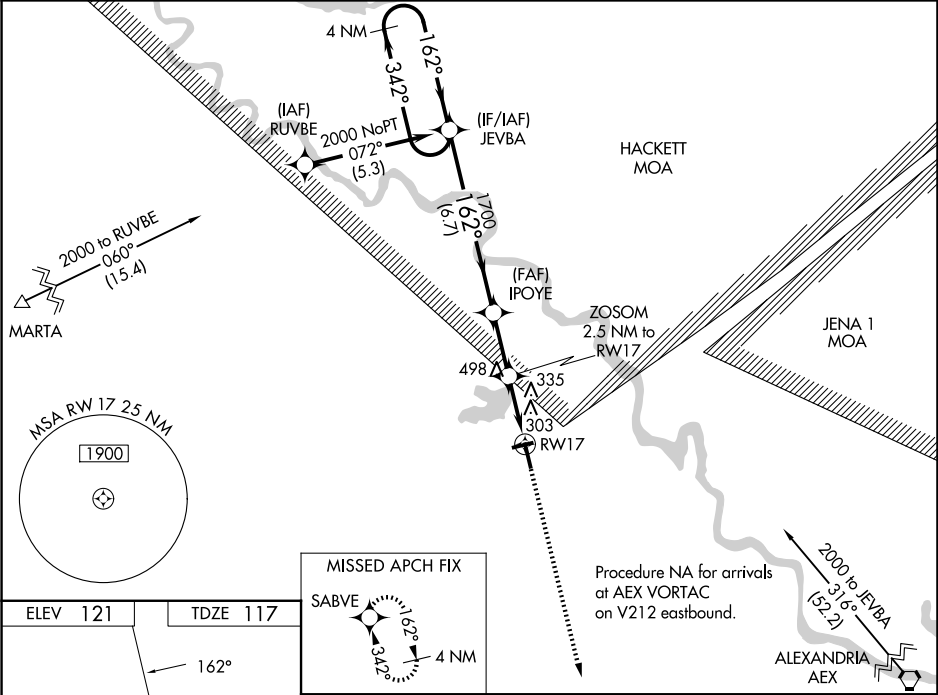

ELEV 121 TDZE 117

162°

4000 X 60

5003 X 150

335

MIRL Rwy 7-25 and 17-35 0
REIL Rwy 7 and 17 0

4 NM Holding Pattern 2000 ← 342° 162° → GP 3.00° TCH 45				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45). JEVBA IPOYE ZOSOM 2.5 NM to RW17 1700 *940 162° 1700 *1.4 NM to RW17 RW17 6.7 NM 2.3 NM 1.1 1.4		2000 SABVE *LNAV only.	
CATEGORY	A	B	C	D			
LPV DA	367-¾ 250 (300-¾)				NA		
LNAV/VNAV DA	658-1 ⅞ 541 (600-1⅞)				NA		
LNAV MDA	620-1	503 (500-1)	620-1⅜ 503 (500-1⅜)		NA		
CIRCLING	800-1	679 (700-1)	860-2 739 (800-2)		NA		