

WAAS CH 42915 W01A	APP CRS 006°	Rwy Ldg 5201 TDZE 915 Apt Elev 925
--	------------------------	---

RNAV (GPS) RWY 1


KIRSCH MUNI (IRS)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. Circling Rwy 6 NA at night. VDP NA when using HAI altimeter setting. Baro-VNAV NA when using HAI altimeter setting. When local altimeter setting not received, use HAI altimeter setting and increase LPV DA to 1219 feet; increase LNAV/VNAV DA to 1395 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2500 direct UKANE and hold.

AWOS-3P 121.325	GREAT LAKES APP CON ★ 121.2 239.25	UNICOM 123.05 (CTAF) 0
---------------------------	--	---

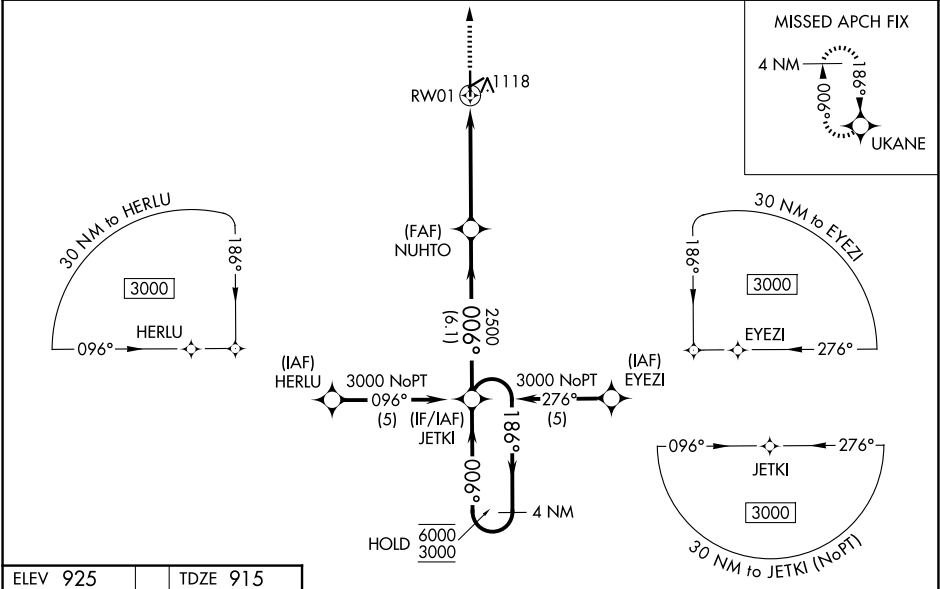

ELEV 925	TDZE 915	2500 UKANE VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26). 4 NM Holding Pattern JETKI 186° 6000 006° 3000 GP 3.00° TCH 40			
61 5201 X 100 3606 X 75 0.3% UP 006° REIL Rwy 1, 19 and 24 MIRL Rwy 1-19 and 6-24		2500 1.7 NM to RW01 3.1 NM 6.1 NM			
CATEGORY		A	B	C	D
LPV DA		1178-1 263 (300-1)			
LNAV/VNAV DA		1354-1¼ 439 (500-1¼)			
LNAV MDA		1480-1 565 (600-1)		1480-1½ 565 (600-1½)	
CIRCLING		1480-1 555 (600-1)		1620-2 695 (700-2)	
				1620-2¼ 695 (700-2¼)	