

WAAS CH 82708 W27A	APP CRS 274°	Rwy Ldg TDZE 1027 Apt Elev 1027
--	------------------------	---

RNAV (GPS) Y RWY 27

KANSAS CITY INTL (MCI)

RNP APCH - GPS.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to 1½ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 4000 direct RUGBB and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8
--------------------------	--	--	-------------------------

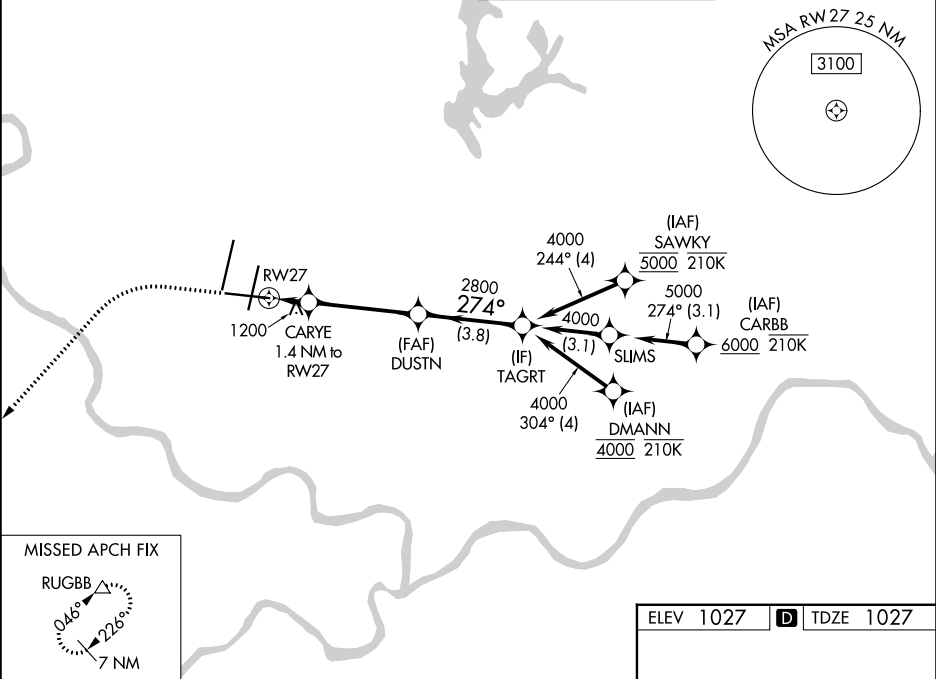

1600		4000		RUGBB △		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 72).		TAGRT	
RW27		CARYE 1.4 NM to RW27		DUSTN 2800		27.4°		4000	
		1540						GP 3.00° TCH 57	
1.4 NM		4 NM		3.8 NM					
CATEGORY		A		B		C		D	
LPV DA*		1227/24		200 (200-½)					
LNAV/ VNAV DA		1496/50		469 (500-1)					
LNAV MDA		1460/24 433 (500-½)		1460/40 433 (500-¾)					
CIRCLING		1540-1 513 (600-1)		1540-1½ 513 (600-½)		1580-2 553 (600-2)			

