


LOC/DME I-DIZ 111.75 Chan 54 (Y)	APP CRS 185°	Rwy Ldg 10000 TDZE 90 Apt Elev 96	ILS RWY 17R (CAT II) ORLANDO INTL (MCO)
--	------------------------	--	---

RADAR required for procedure entry. DME or RADAR required.	ALS F-2 	MISSED APPROACH: Climb to 3000 on ORL VORTAC R-174 to NOGGI/ ORL 22.8 DME and hold.
Simultaneous approach authorized. When using alternate missed approach, simultaneous approach NA. Bright lights on highway midway between Rwy 17L and Rwy 17R may be mistaken for runway lights.		

D-ATIS 121.25	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	GND CON 126.4 (E) 121.8 (W)
-------------------------	---------------------------------------	--	---

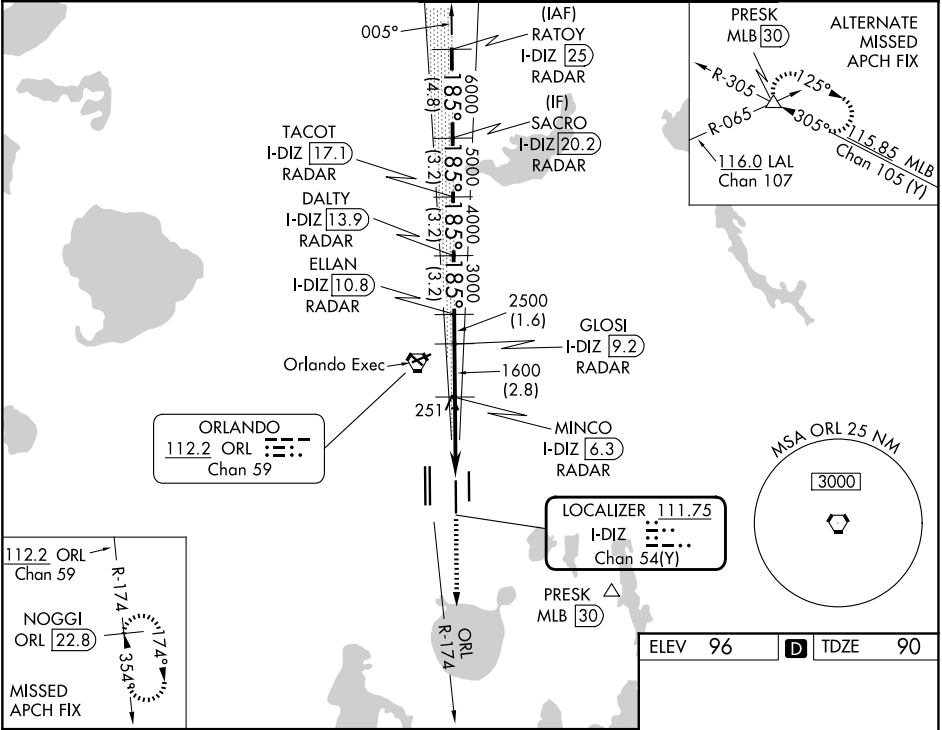

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).				3000	ORL R-174	NOGGI ORL 22.8
RATOY I-DIZ 25 RADAR	SACRO I-DIZ 20.2 RADAR	TACOT I-DIZ 17.1 DALTY I-DIZ 13.9 RADAR	ELLAN I-DIZ 10.8 RADAR	GLOSI I-DIZ 9.2 RADAR	MINCO I-DIZ 6.3 RADAR	
6000 185° 6000 185° 5000 4000 3000 2500 1600						
GS 3.00° TCH 53						
-4.8 NM -3.2 NM -3.2 NM -3.2 NM -1.6 NM -2.8 NM -4.5 NM 1051'						
CATEGORY	A		B		C	
S-ILS 17R	RA 104/12		100		DA 190	
CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED						
HIRL all rwys REIL Rwy 36L TDZL/RCLS Rwys 17L/R, 35L/R and 36L/R						

SE-3, 29 OCT 2026 to 26 NOV 2026

SE-3, 29 OCT 2026 to 26 NOV 2026