



|                                                      |                        |                             |                                       |
|------------------------------------------------------|------------------------|-----------------------------|---------------------------------------|
| LOC/DME I-ARK<br><b>110.95</b><br>Chan <b>46</b> (Y) | APP CRS<br><b>185°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>9001</b><br><b>90</b><br><b>96</b> |
|------------------------------------------------------|------------------------|-----------------------------|---------------------------------------|

ILS or LOC RWY 17L

ORLANDO INTL (MCO)

|                                                                                                                                                                                                    |            |                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNAV 1-DME/DME/IRU or GPS or RADAR required for procedure entry. DME or RADAR required.                                                                                                            | ALSF-2<br> | MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on heading 100° and ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000. |
| Bright lights on highway midway between Rwy 17L and Rwy 17R may be mistaken for runway lights. Simultaneous approach authorized. For inop ALS, increase S-LOC 17L Cats C/D visibility to RVR 6000. |            |                                                                                                                                                                        |

|                         |                                       |                                                                                                        |                                                 |
|-------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| D-ATIS<br><b>121.25</b> | ORLANDO APP CON<br><b>124.8 307.0</b> | ORLANDO TOWER<br><b>118.45 253.5</b><br><b>124.3 253.5</b><br>(17L/35R, 17R/35L)<br>(18L/36R, 18R/36L) | GND CON<br><b>126.4</b> (E)<br><b>121.8</b> (W) |
|-------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------|

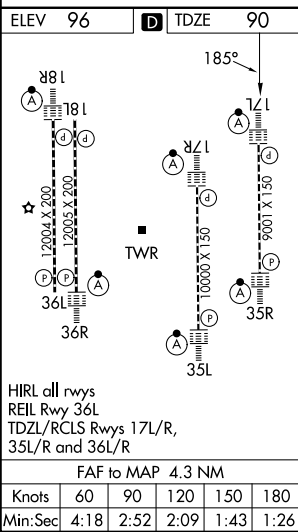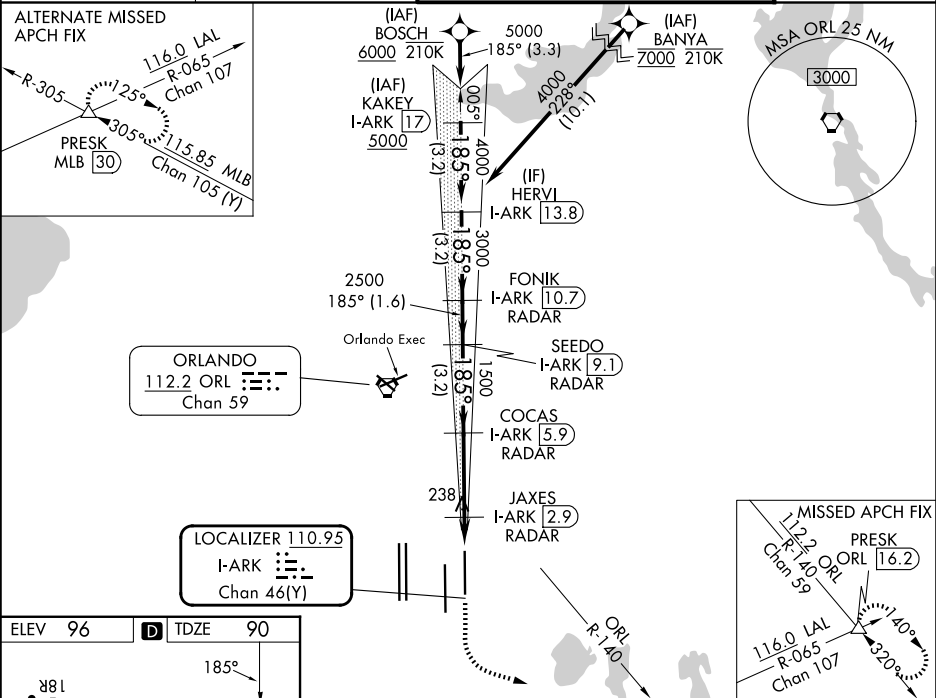

|                                                 |         |                                                                  |      |       |       |
|-------------------------------------------------|---------|------------------------------------------------------------------|------|-------|-------|
| ELEV 96                                         | TDZE 90 | VGSi and ILS glidepath not coincident (VGSi Angle 3.00°/TCH 72). |      |       |       |
| BOSCH KAKEY HERVI FONIK SEEDO COCAS JAXES I-ARK |         | 500                                                              | 3000 | ORL   | PRESK |
| I-ARK I-ARK I-ARK I-ARK I-ARK I-ARK I-ARK       |         | hdg                                                              | hdg  | R-140 | △     |
| GS 3.00° TCH 55                                 |         |                                                                  |      |       |       |
| CATEGORY                                        |         | A                                                                | B    | C     | D     |
| S-ILS 17L                                       |         | 290/18 200 (200-½)                                               |      |       |       |
| S-LOC 17L                                       |         | 500/24 410 (500-½) 500/40 410 (500-¾)                            |      |       |       |
| CIRCLING                                        |         | 740-1 644 (700-1) 740-1¾ 644 (700-1¾) 740-2 644 (700-2)          |      |       |       |