


RNAV (GPS) RWY 24R

WAAS CH 61450 W24B	APCH CRS 243°	Rwy Idg 12,000 TDZE 475 Arpt Elev 477
--------------------------	------------------	---

[USN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

RNP APCH-GPS *When ALS inop, increase vis to 1½ miles. **When ALS inop, increase vis to 1¾ miles. ***When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1¾ miles.		ALSF-1 	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct REDIN and hold.		
ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925	GND CON 128.625 307.325	LA CENTER 291.7	ASR/ PAR

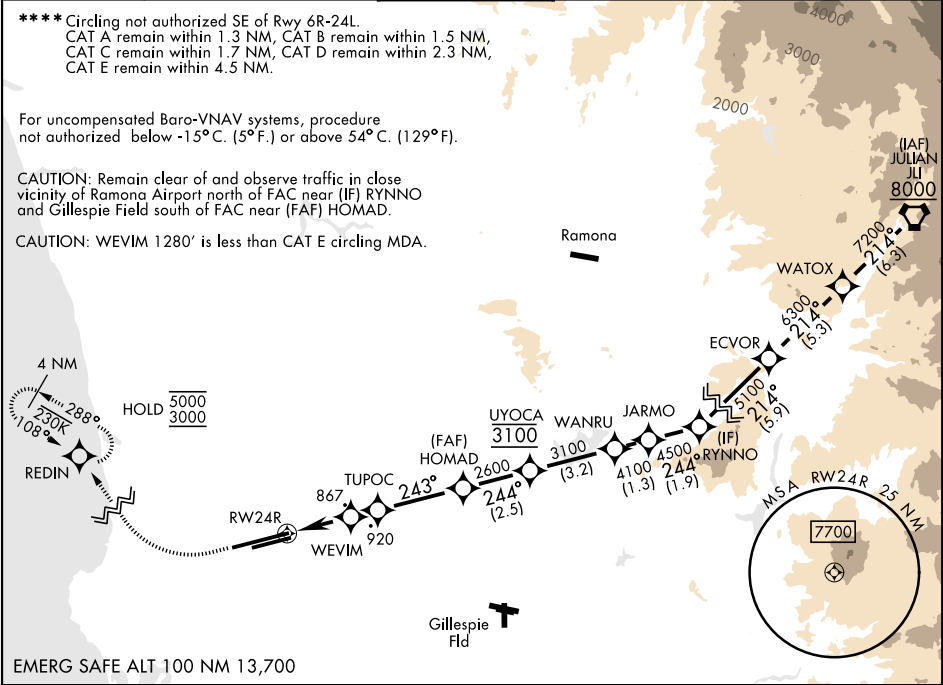

Profile view diagram showing the approach path with altitudes and distances. Key points include WEVIM (1280'), TUPOC (1600'), HOMAD (2600'), UYOCA (3100'), JARMO (4100'), WANRU (4500'), and RYNNO (5100'). Distances are marked as 2.4 NM, 1 NM, and 3.5 NM. A 1.8 NM distance is marked to RW24R. The path is defined by a 243° heading. A GP 3.00° TCH 53 is indicated.

CATEGORY	A	B	C	D	E
LPV DA*	878-¾		403	(500-¾)	
LNNAV/VNAV DA**	941-1 466 (500-1)	952-1 477 (500-1)	960-1 485 (500-1)	971-1	496 (500-1)
*** LNNAV MDA	1120-½	645 (700-½)	1120-1⅓ 645 (700-1⅓)		
**** CIRCLING	1120-1	643 (700-1)	1120-1⅞ 643 (700-1⅞)	1220-2½ 743 (800-2½)	1500-3 1023 (1100-3)

Plan view diagram showing the approach path with altitudes and distances. Key points include the TWR (760'), the runway (243°), and the approach path (063°). Distances are marked as 0.48 DOWN, 0.6% DOWN, and 1000 x 100. A 243° heading is indicated.

HIRL Rwy 6L-24R
HIRL Rwy 6R-24L

RNAV (GPS) RWY 24R

SW-3, 29 OCT 2026 to 26 NOV 2026

SW-3, 29 OCT 2026 to 26 NOV 2026