
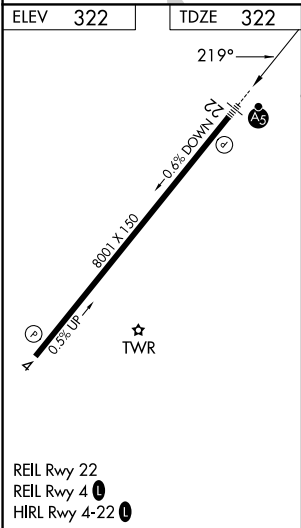




WAAS CH 86212 W22A	APP CRS 219°	Rwy Ldg TDZE 322 Apt Elev 322
--	------------------------	---

RNAV (GPS) RWY 22
MILLINGTON/MEMPHIS (NQA)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 840 then climbing right turn to 2500 direct ZIVNY and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. ▲ For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cat E visibility to 1½ SM.			

ATIS 118.925	MEMPHIS APP CON 119.1 291.6 125.8 338.3 (176°-355°) (356°-175°)	MILLINGTON TOWER ★ 120.25 (CTAF) 0 340.2	GND CON 121.375	UNICOM 122.95
------------------------	---	--	---------------------------	-------------------------

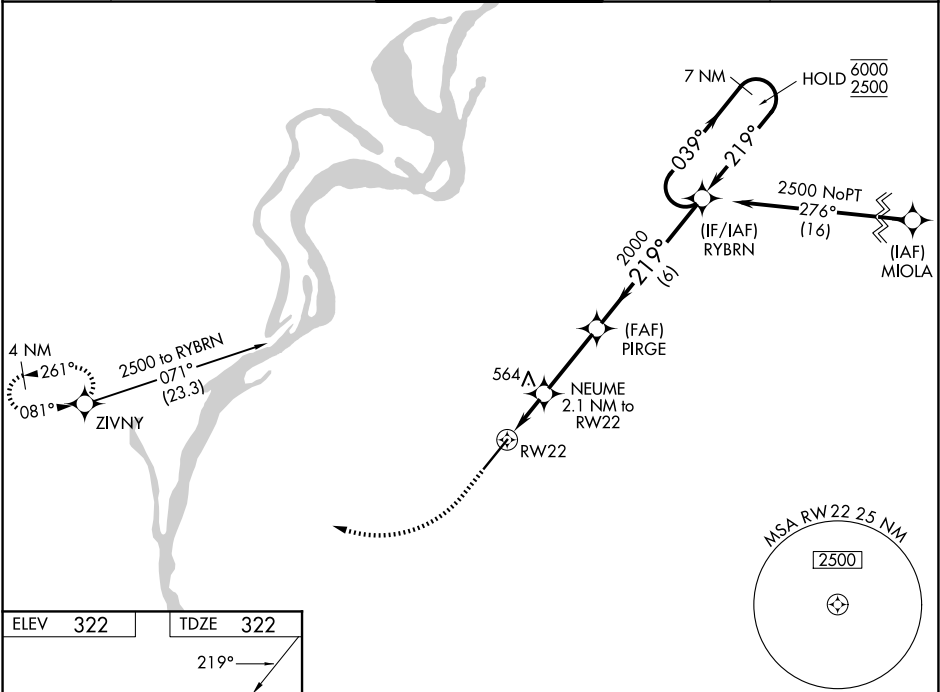

840 ↑		2500 ↗		ZIVNY 		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).		7 NM Holding Pattern	
				NEUME 2.1 NM to RW22		PIRGE 2000		RYBRN 039°↗ 6000 2500 ←219°	
		1.2 NM to RW22		1040		2000		GP 3.00° TCH 55	
		1.2 NM		0.9 NM		3 NM		6 NM	
CATEGORY	A		B		C		D		E
LPV DA	522-½		200 (200-½)						
LNAV/VNAV DA	784-1		462 (500-1)						
LNAV MDA	780-½ 458 (500-½)		780-¾ 458 (500-¾)						
CIRCLING	800-1 478 (500-1)		820-1 498 (500-1)		920-1½ 598 (600-1½)		960-2 638 (700-2)		960-2¼ 638 (700-2¼)

SE-1, 29 OCT 2026 to 26 NOV 2026

SE-1, 29 OCT 2026 to 26 NOV 2026