

WAAS CH 97512 W32A	APP CRS 324°	Rwy Ldg TDZE 715 Apt Elev 726
--	------------------------	---

RNAV (GPS) RWY 32
WINCHESTER RGNL (OKV)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using MRB altimeter setting. When local altimeter setting not received, use MRB altimeter setting: increase LPV DA to 979 feet; increase LNAV/VNAV DA to 1120 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ¼ SM and Circling visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM and LNAV visibility Cats C and D to 1½ SM.

MALSR

MISSED APPROACH:
Climb to 5000 direct IMHEM and on track 018° to MEPEW and hold, continue climb-in-hold to 5000.

AWOS-3PT 124.85	POTOMAC APP CON 120.45 306.925	CLNC DEL 126.15	UNICOM 122.975 (CTAF) 1
---------------------------	--	---------------------------	--

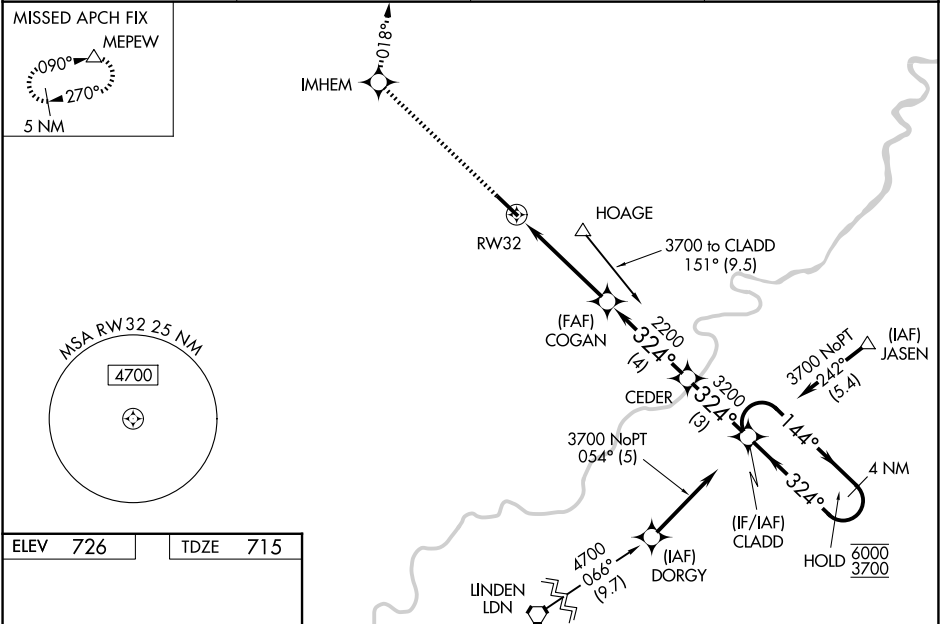

5000

IMHEM

tr 018°

MEPEW

4 NM

CLADD

Holding Pattern

1.2 NM to RW32

COGAN 2200

CEDER 3200

CLADD 3700

GP 3.00° TCH 44

1.2 NM

3.3 NM

4 NM

3 NM

CATEGORY	A	B	C	D
LPV DA		915-1½	200 (200-1½)	
LNAV/VNAV DA		1056-5⁄8	341 (400-5⁄8)	
LNAV MDA	1120-1½	405 (400-1½)	1120-3⁄4	405 (400-3⁄4)
CIRCLING	1180-1 454 (500-1)	1220-1 494 (500-1)	1380-1¾ 654 (700-1¾)	1500-2½ 774 (800-2½)

REIL Rwy 14 **1**

HIRL Rwy 14-32 **1**

NE-3, 29 OCT 2026 to 26 NOV 2026

NE-3, 29 OCT 2026 to 26 NOV 2026